



# PHOENIKS

## FLEXICOMBI MAGICPILOT 10.1 ELECTRIC MODEL NO: FKE101R\_MP

MKN combi steamer FlexiCombi 10 tray GN 1/1 or 10 FlexiRack® (530 x 570 mm) with MagicPilot operation system.


### Product Advantages:

- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- FlexiRack® – 50% more cooking capacity (= save time and energy).
- Video assist – Interactive user assistance with clips featuring professional chefs.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system (safe, easy, economical).
- USB interface.
- 3 years warranty parts and labour.

### Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

|                         |                      |
|-------------------------|----------------------|
| Capacity: Meals per day | 80 – 150 (GN 1/1)    |
|                         | 80 – 200 (FlexiRack) |

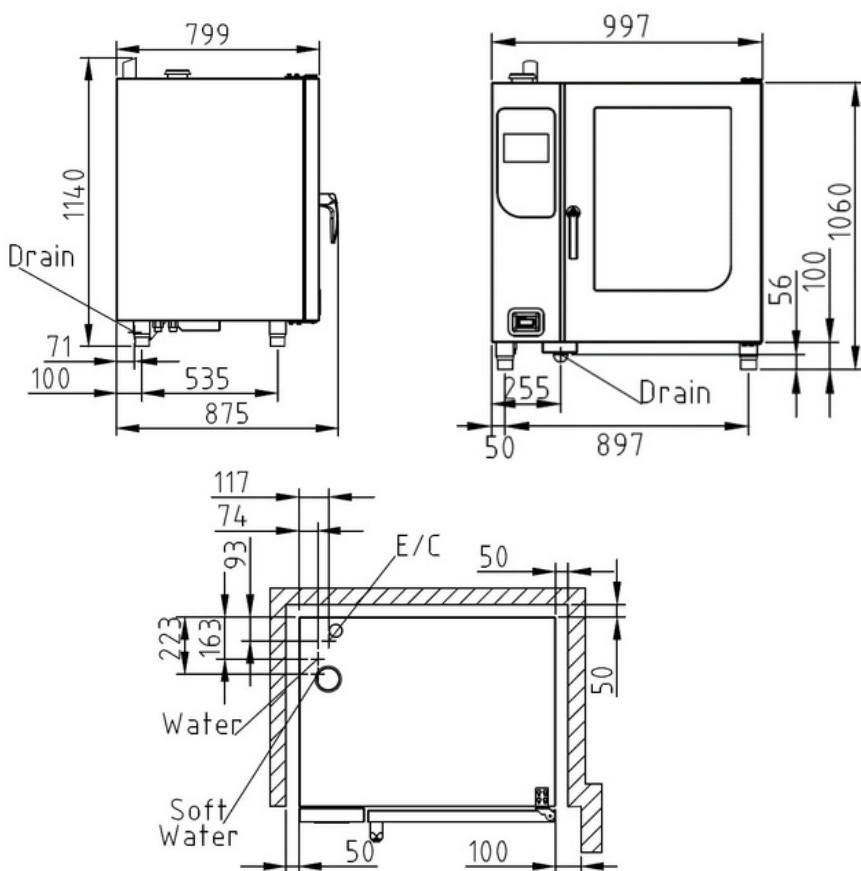

### Technical Data:

|                                     |                       |
|-------------------------------------|-----------------------|
| Width x Height x Depth (mm)         | 997 x 1060 x 799      |
| Connected load (electrical) (kW):   | 15.9                  |
| Voltage (V) / EC:                   | 415 3 phase AC        |
| Recommended fuses (A):              | 3 x 32                |
| Frequency range (Hz):               | 50                    |
| Soft Water connection:              | DN 20 (R ¾" inside)   |
| Water connection:                   | DN 20 (R ¾" inside)   |
| Waterpressure (kPa):                | 200 - 600 (2 - 6 bar) |
| Drain connection:                   | DN 50                 |
| FlexiRack® (530 x 570 mm)           | 10 (max. 65 mm deep)  |
| Gastronorm 1/1 (530 x 325 mm):      | 10 (max. 65 mm deep)  |
| Plates Ø 28 cm on FlexiRack® grids: | 40                    |
| Plates Ø 32 cm – plate trolley :    | 40                    |
| Material housing:                   | 1.4301                |
| Material cooking chamber:           | 1.4404                |
| Gross weight (kg):                  | 180                   |
| Heat emission latent (W):           | 2862                  |
| Heat emission sensitive (W):        | 1908                  |
| Type of protection:                 | IPX 5                 |



phoeniks.com.au  
P- 1300 405 404  
E- contact@phoeniks.com.au