




For boiling, steaming, frying, braising, simmering. For cooking meat, quick-fried meat, egg products, fish, milk products and side dishes.

Product Advantages:

- Housing made completely of stainless steel.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- SUPRA contact heating elements for an optimal heat distribution and short heating up times.
- 65 mm gap between pan and side frame, for easy cleaning.
- Electronic temperature regulation
- "EcoControl" as standard.
- Double walled hinged lid as standard.
- Equipped for connection to a power optimization system.
- Including mixing faucet.
- Motorised tilting system

Installation requirements:

- Electrical supply provided by customer.

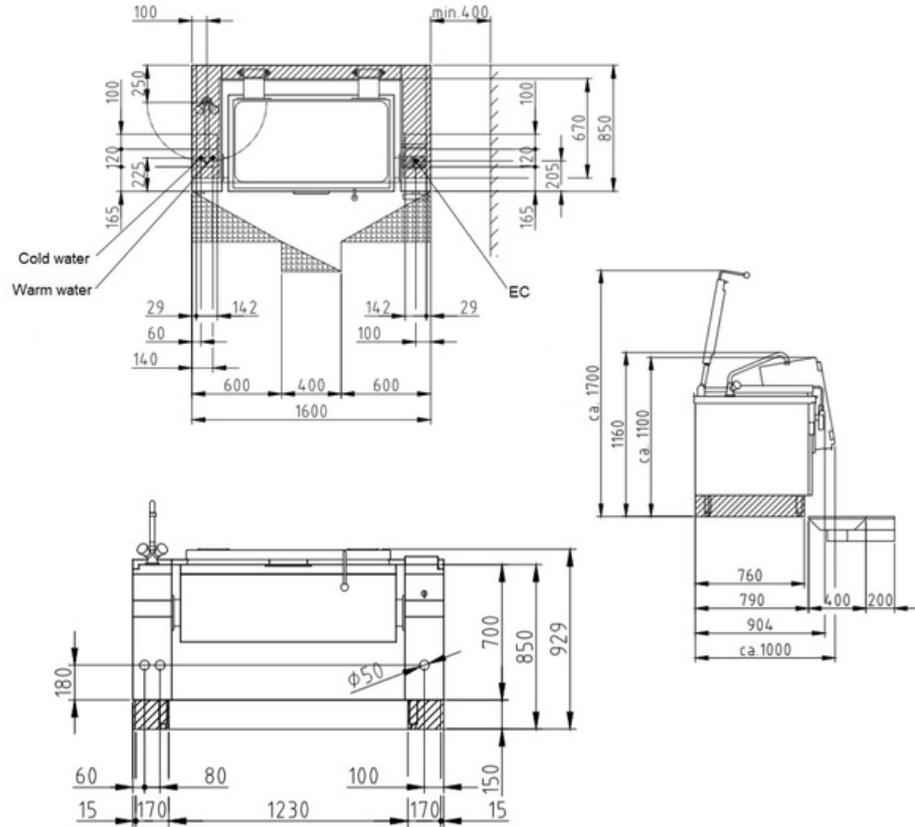

Technical Data:

Width x Height x Depth (mm)	1600 x 700 x 850
Effective area	1
Dim.: effect. Area (mm)	1020 x 210 x 540
Nominal capacity (L):	116
Nominal fill quantity (L):	94
Connected load (elect.) (kW):	19.4
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Frequency range (Hz):	50
Net weight (kg):	245
Gross weight (kg):	285
Heat emission latent (W):	7760
Heat emission sensitive (W):	8730
Type of protection:	IPX5

