

For cooking with contact heat, for frying of quick-fried pieces, starch side dishes, egg dishes, desserts such as pancakes and for grilling.


Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- U-shaped connection channel, flush with top, tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via outlet in the top plate at the front.
- Modular appliance for everyday use in small and medium sized professional kitchens.
- SUPRA heating system for greater heating capacity and even heat distribution, shorter heating up times and a longer service life of heating elements.
- Appliance with two separate heating zones.
- Supplied ready for connection to a power optimising system.



• Electrical supply provided by customer.



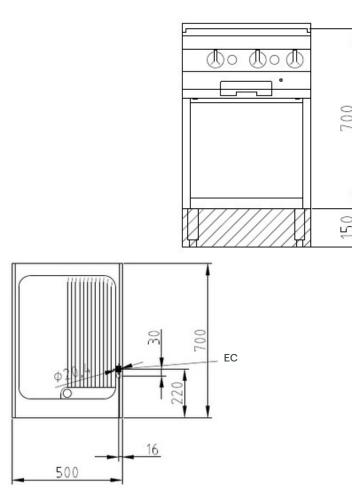

Technical Data:	
Width x Height x Depth (mm)	500 x 700 (900) x 700
Effective area	1
Dim.: effect. Area (mm)	440 x 560
Connected load (elect.) (kW):	7.2
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 16
Net weight (kg):	70
Gross weight (kg):	80
Heat emission latent (W):	2880
Heat emission sensitive (W):	2376
Type of protection:	IPX4

f 🞯 ն 💌

phoeniks.com.au P- 1300 405 404 E- contact@phoeniks.com.au