




For cooking with contact heat, for frying of quick-fried pieces, starch side dishes, egg dishes, desserts such as pancakes and for grilling.

Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- U-shaped connection channel, flush with top, tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via outlet in the top plate at the front.
- Modular appliance for everyday use in small and medium sized professional kitchens.
- SUPRA heating system for greater heating capacity and even heat distribution, shorter heating up times and a longer service life of heating elements.
- Appliance with two separate heating zones.
- Frying pan made completely of CNS.
- Smooth frying surface made of PowerBlock special sandwich material.
- This unit has multifunctional usage and can cope with frying, boiling, steaming or stewing.
- Supplied ready for connection to a power optimization system.

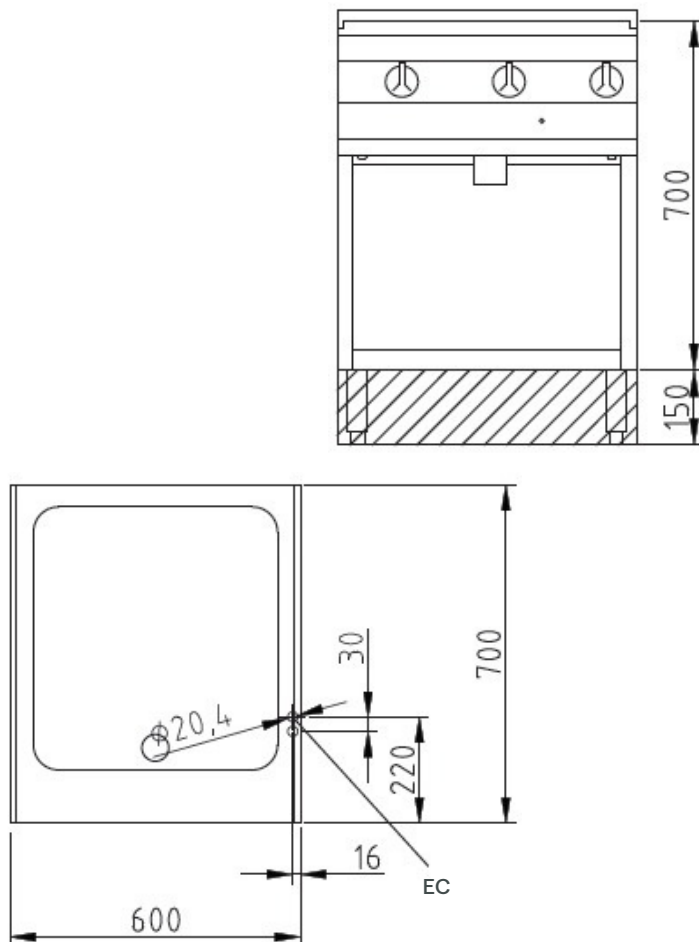

Installation requirements:

- Electrical supply provided by customer.



Technical Data:

Width x Height x Depth (mm)	600 x 700 (900) x 850
Effective area	1
Dim.: effect. Area (mm)	500 x 100 x 540
Nominal capacity (L):	26
Connected load (elect.) (kW):	7.2
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 16
Net weight (kg):	82
Gross weight (kg):	91
Heat emission latent (W):	2880
Heat emission sensitive (W):	3240
Type of protection:	IPX5

