

For all-purpose cooking in liquid in commercial kitchens, for vegetables, starch side dishes, soups, sauces, in particular also acidic dishes as well as desserts.


## Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Low energy and water consumption but highly efficient due to a double jacketed kettle with separate VAPRO steam generator.
- Short heating up times with VAPRO pressure steam system.
- 3 cooking programmes as standard (light simmering, medium boiling and strong boiling).
- · Because of the steam generator with utility water monitor and automatic water level regulation the appliance is constantly ready for use.
- Double walled hinged lid with spring loaded swivel joints as standard.
- 1/2" old and warm water supply required.
- · Equipped for connection to a power optimization system - with mixing tap R3/4" (DN20).

## Installation requirements:

• Electrical supply provided by customer.



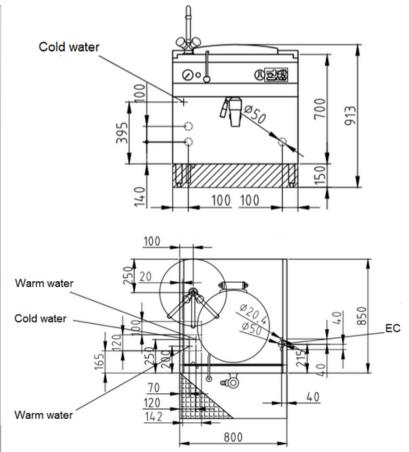

Technical Data:	
Width x Height x Depth	800 x 700 x 850
(mm):	
Effective area:	1
Dim.: effect. Area (mm):	x 378 x
Diameter (mm):	500
Nominal capacity (L):	60
Connected load (elect.)	15.8
(kW):	
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Frequency range (Hz):	50
Heat-up time (Min.):	21
Net weight (kg):	110
Gross weight (kg):	119
Heat emission latent (W):	3160
Heat emission sensitive (W):	553
Type of protection:	IPX6



phoeniks.com.au

- P-1300 405 404
- E- contact@phoeniks.com.au