


For boiling, steaming, frying, braising, simmering as well as pressureless cooking and pressure cooking for shorter cooking times. For cooking meat, quick-fried meat, egg products, fish, milk products and side dishes.

### Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Pan made of heat resistant steel as standard.
- SUPRA heating system-contact heating elements integrated into aluminium blocks ensure greater heating capacity and even distribution of heat, with short heating up times and longer service life.
- Appliance with two separately adjustable heating zones.
- 65 mm gap between pan and side columns, for easy cleaning.
- Double walled hinged lid as standard.
- Equipped for connection to a power optimization system with potential free contact as standard.

### Installation requirements:

- Electrical supply provided by customer

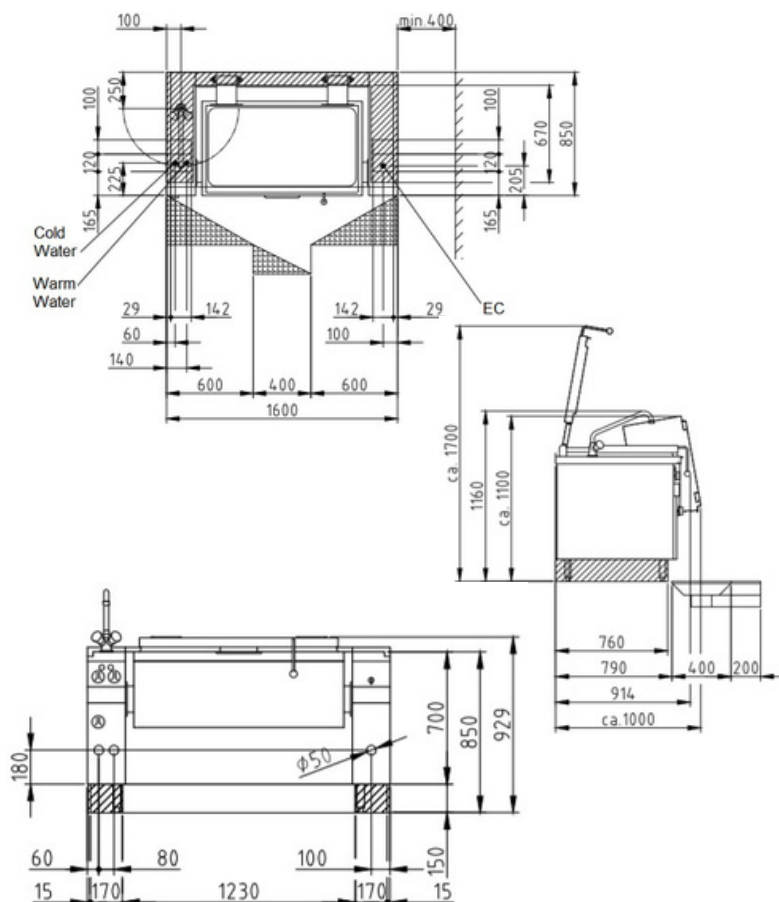

### Technical Data:

Width x Height x Depth (mm)	1600 x 700 x 850
Effective area	1
Dim.: effect. Area (mm)	1020 x 210 x 540
Nominal capacity (L):	116
Nominal fill quantity (L):	94
Connected load (elect.) (kW):	14.6
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Frequency range (Hz):	50
Standard gas pressure (mbar)	30 (DE), 50 (EU)
Liquid gas	
Net weight (kg):	245
Gross weight (kg):	285
Heat emission latent (W):	5840
Heat emission sensitive (W):	6570
Type of protection:	IPX5

