




For cooking with contact heat, for frying of quick-fried pieces, starch side dishes, egg dishes, desserts such as pancakes and for grilling.

### Product Advantages:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- U-shaped connection channel, flush with top, tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via outlet in the top plate at the front.
- Modular appliance for everyday use in small and medium sized professional kitchens.
- SUPRA heating system for greater heating capacity and even heat distribution, shorter heating up times and a longer service life of heating elements.
- Appliance with two separate heating zones.
- Supplied ready for connection to a power optimising system.

### Installation requirements:

- Electrical supply provided by customer.

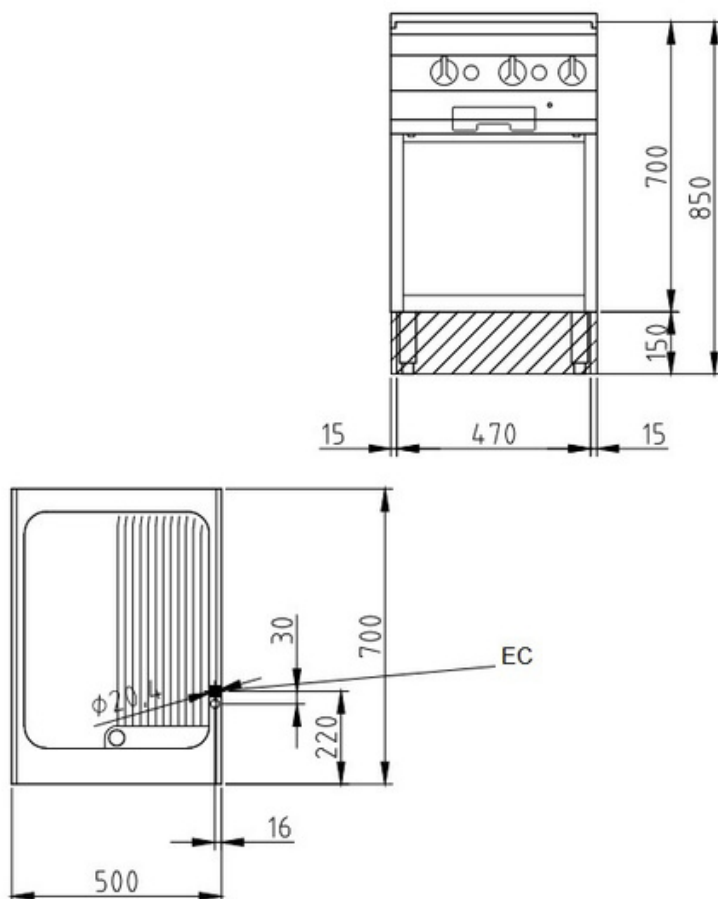

### Technical Data:

Width x Height x Depth (mm)	500 x 700 x 700
Effective area	1
Dim.: effect. Area (mm)	440 x XXX x 560
Connected load (electrical) (kW):	7.2
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 16
Frequency range (Hz):	50
Standard gas pressure (mbar)	20
Natural gas	
Standard gas pressure (mbar)	30 (DE), 50 (EU)
Liquid gas	
Net weight (kg):	70
Gross weight (kg):	80
Heat emission latent (W):	2880
Heat emission sensitive (W):	2376
Type of protection:	IPX4

