




Product Advantages:

- Compact – Can be used in many areas.
- Automatic plate detection – Switchable clever function. Due to the quick heating systems, you will save precious energy. Up to 70 % reduced power consumption with the Salvis plate detection.
- Reflector – The head reflector is equipped with a patented double coat and a smart heating system; it prevents high temperatures on the reflector handle.
- Timer – The device will automatically switch off after the desired grination time.
- Operation – Three operating modes to choose from. Manual, semi-automatic and fully automatic.
- Hygiene – High-quality workmanship, large radii and foldable plate rest.
- Heating systems – Fast HiLight heater (HL).

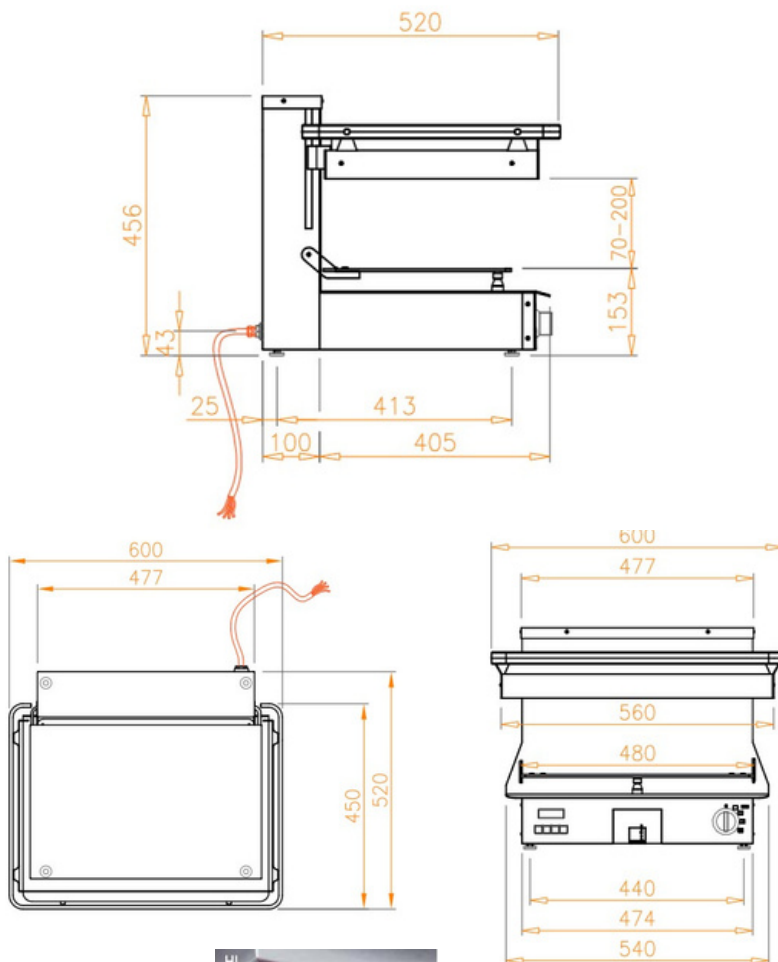

Technical Data:

Dimensions (W x D x H)	600 x 520 x 445 mm
Electronic timer	0 to 20 minutes
Sensible heat emission	2.80 kW
Latent heat emission	0.70 kW
Connected Load	4.6 kW
Voltage (V) / EC	415 3 phase AC
Recommended fuses	3 x 20 A
Frequency	50 Hz

