




INVISIBLE INDUCTION BUFFET



ADAPTABLE

Induc-Stone is installed under your worktop (maximum 20mm thick), no cutting required. Compatible with a wide range of materials* including:

-  Marble
-  Granite
-  Wood
-  Quartz

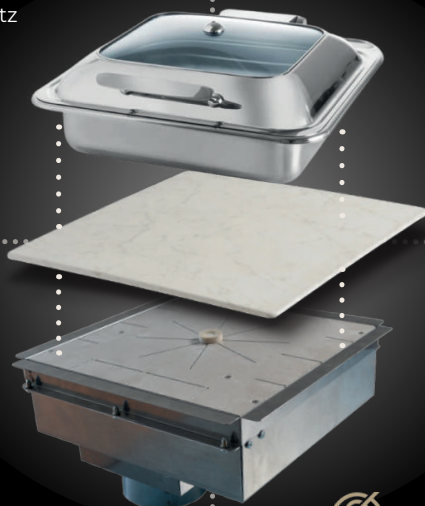

SECURITY & RELIABILITY

This technology is an exclusive Adventys patent. Switch your buffet from a neutral zone to a heating zone in seconds. This high performance & durable product offers an innovative & economical solution that has proven itself around the world.



PRECISE CONTROL

You choose your power level! The 20 steps allow you to precisely control the temperature of your food.



INVISIBLE INDUCTION

Your container reaches 90-95°C while the worktop surface remains cool, not higher than 55°C. There is no risk of deterioration over time. Customers and staff are in a safe environment.




ECO-FRIENDLY TECHNOLOGY

BUFFET Induc-Stone



Induc-Stone - Invisible Buffet

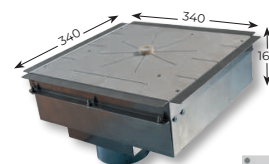

Cut-out dimensions 48 x 163 mm

INDUC STONE
ADV1587



- 650W
- Product dimensions 340 x 340 x 167 mm
- Deported control panel with 3 touches and 2 digits, manual power setting (20 power levels)
- Power supply 220-240V single-phase / 50-60Hz
- Including 1m80 power cable
- Including a spacer - Compulsory use



Silicone spacer



BUFFET Counter-top Induc-Elegance



Induc-Elegance | 1 zone induction counter-top buffet



IE 300 CB
ADV1831



IE 1000 CB
ADV1852



IE 300 BB
ADV1832

IE 1000 BB
ADV1853




IE 300 BS
ADV1809

IE 1000 BS
ADV1850



IE 300 SS
ADV1810

IE 1000 SS
ADV1851

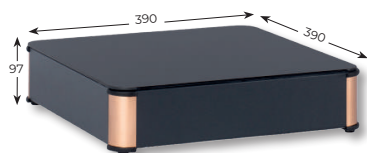

- 300W ou 1000W
- Glass dimensions 390 x 390 x 4 mm thick
- Capacitive touches control panel - 12 levels of temperature
- Power supply 220-240V single-phase / 50-60Hz
- Option: Interconnection cable which permits to connect 4 products together for 300W and up to 2 for 1000W version
- Four standards models, customizable version upon request



BUFFET Counter-top Induc-Elegance

Induc-Elegance 2 | 2 zones induction counter-top buffet



IE2 600 SS
ADV1842



IE2 600 BS
ADV1841



IE2 600 BB
ADV1844



IE2 600 CB
ADV1843

- 2 x 300W
- Glass dimensions 620 x 390 x 4 mm thick
- Capacitive touches control panels lavier - 3 touches and 12 levels of temperature
- Power supply 220-240V single-phase / 50-60Hz
- No interconnection with this version
- 4 standards models, customizable version upon request


Adventys is the Buffet specialist

*Elegance
Pure and modern design
Made in France Technology*



BUFFET Drop-in Induc-Elegance

Induc-Elegance F-DIR | Drop-in induction buffet

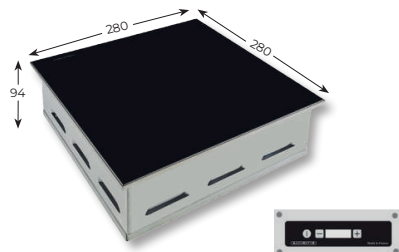


IE F DIR 300
ADV1816

IE F DIR 1000
ADV1835

Product cut-out dimensions 270 x 270 mm
Control panel cut-out dimensions 198 x 68 mm

- 300W ou 1000W
- Glass dimensions 280 x 280 x 4 mm thick
- Capacitive touches control panels lavier - 3 touches and 12 levels of temperature
- Power supply 220 - 240V single-phase / 50-60Hz
- Supplied with silicone seal for drop-in
- Made to be installed flushed or drop-in
- Options: Interconnection cable to connect up to 4 products together (300W version) and up to 2 products for 1000W version

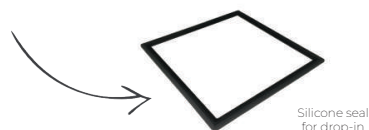


Silicone seal
for drop-in



BUFFET Drop-in Intensive Use

Buffet induction | 1 zone Drop-in

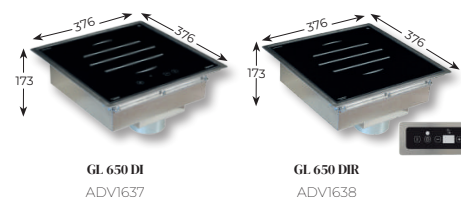


GL 650 DI
ADV1637

GL 650 DIR
ADV1638

Product cut-out dimensions 346 x 346 mm
Control panel cut-out dimensions 48 x 163 mm

- 650W
- Glass dimensions 340 x 340 mm with frame
- Capacitive touches control panel and 2 digits display.
Integrated or Remote
- Manual temperature setting from 40°C to 90°C (9 levels of temperature)
- Timer on DIR version
- Intensive use 24/24 - 7/7
- Power supply 220-240V single-phase / 50-60Hz
- Including 1m80 power cable

Buffet induction | 1 zone Flushed

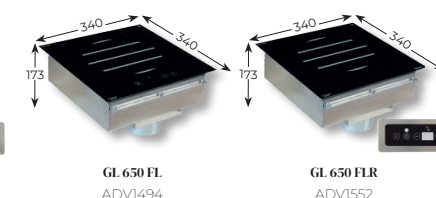

GL 650 FL
ADV1494

GL 650 FLR
ADV1552

Product cut-out dimensions 346 x 346 mm
Control panel cut-out dimensions 48 x 163 mm

- 650W
- Glass dimensions 340 x 340 mm
- Capacitive touches control panel and 2 digits display.
Integrated or Remote
- Manual temperature setting from 40°C to 90°C (9 levels of temperature)
- Timer on FLR version
- Intensive use 24/24 - 7/7
- Power supply 220-240V single-phase / 50-60Hz
- Including 1m80 power cable

ADVENTYS