



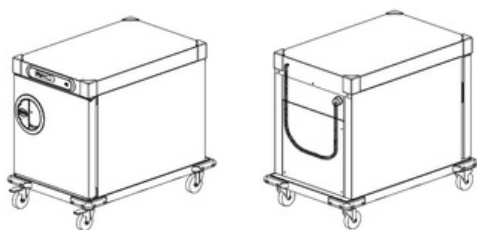

Product Advantages:

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Wheels - 80 mm with stainless steel cover, 2 with brakes.
- Moulded polyethylene bumpers.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.

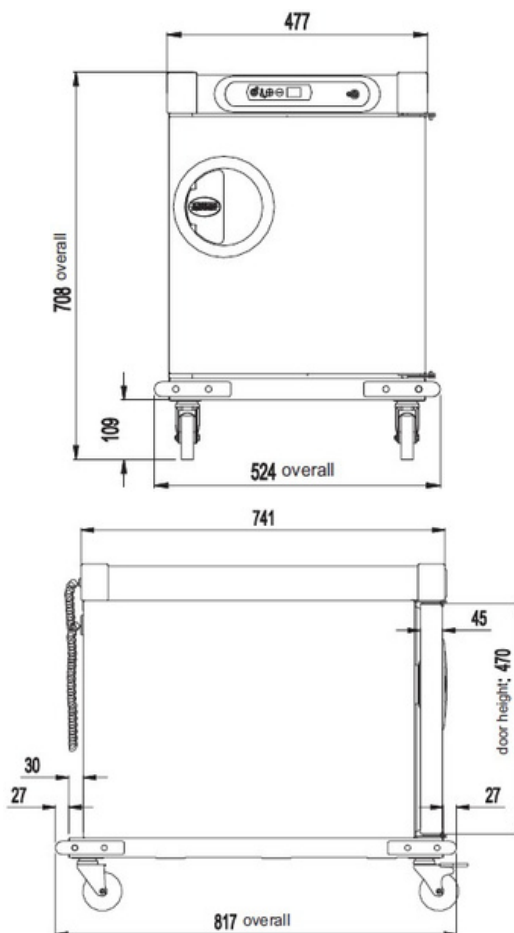

Technical Data:

Reference	507 301
Loading	5 GN1/1 containers h. 65 mm
Space between sliders	71 mm
External dimensions	524 x 817 x 708 mm
Internal dimensions	330 x 590 x 395 mm
External volume	0.303 m ³
Internal volume	0.077 m ³
Weight when empty	48 kg
Connected load	0.82 kW - 240 1 phase AC 1 x 10 A
Current (A)	3.8
Power consumption	0.22 kwh
Protection index	25
Standards	NF EN 60335-1 NF EN 60335-2-49

