




**Product Advantages:**

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels - 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with

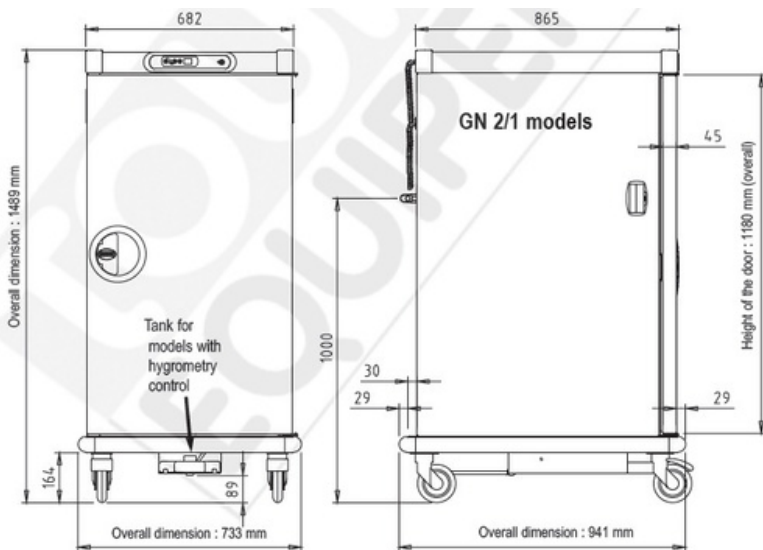

**Hygrometry Control:**

- Hygrometry controlled by 5 pre-set cycles in the elec. control thermostat.
- Removable rotomoulded tank, capacity 2 litres, accessible from the front.



**Technical Data:**

Reference	507 456
Loading	15 GN2/1 containers h. 65mm Or 30 GN1/1 containers h. 65mm
Space between sliders	71 mm
External dimensions	733 x 941 x 1489 mm
Internal dimensions	535 x 710 x 1105 mm
External volume	1.027 m <sup>3</sup>
Internal volume	0.42 m <sup>3</sup>
Weight when empty	113 kg 240 kg
Connected load	1.2 kW - 240 1 phase AC 1 x 10 A
Current (A)	8.4
Power consumption	0.4 kwh
Protection index	25
Standards	NF EN 60335-1 NF EN 60335-2-49

