




Product Advantages:

- · Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with pressdrawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels 125 mm with polyamide cover,
 2 with brakes.
- · Circumferential bumpers.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.

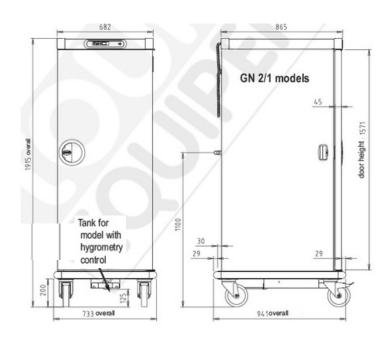

Hygrometry Control:

Technical Data:

Reference

- Hygrometry controlled by 5 pre-set cycles in the elec. control thermostat.
- Removable rotomoulded tank, capacity 2 litres, accessible from the front.

507 486



20 GN2/1 containers h. 65mm Loading 40 GN1/1 containers h. 65mm Space between sliders 71 mm 733 x 941 x 1915 mm **External dimensions** 535 x 710 x 1460 mm Internal dimensions 1.296m3 External volume 0.555 m3 Internal volume 135 kg Weight when empty 2.0 kW - 240 1 phase AC Connected load 1 x 10 A Current (A) 9.1

0.78 kwh

NF EN 60335-1 NF EN 60335-2-49

25











Power consumption

Protection index

Standards