




Product Advantages:

- Made of food quality stainless steel.
- Insulation of walls 45 mm rock wool + 20 mm melamine foam.
- Insulation of door 45 mm thick with rock wool. Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels Ø 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Fan-assisted refrigeration controlled by an electronic thermostat with digital readout and the following functions:
- Adjustment range of set value from 0 to 10 °C.
- Possibility of deferred start.
- Dysfunction alarms for cabinet and refrigerated unit maintenance.

Spiral power cable 3G1.5 with moulded plug + plug support.

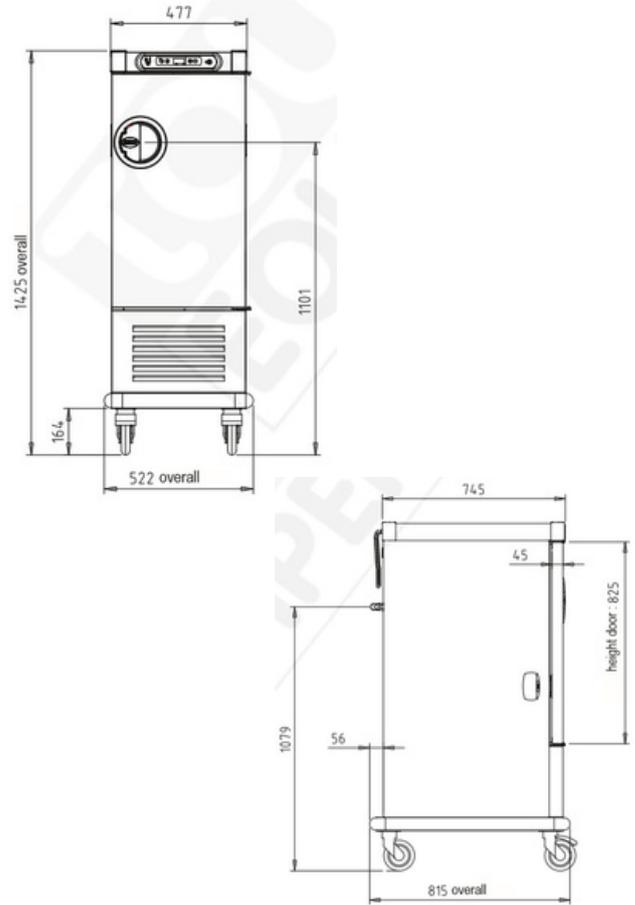

Technical Data:

Reference	.507 285
Loading	10 GN1/1 h. 65mm
Space between sliders	71 mm
Overall dim. (L x D x H)	552 x 815 x 1425 mm
Internal dim (L x D x H)	330 x 590 x 750 mm
Weight when empty	90 kg
Max Loading	120 kg
Voltage (V)	240 1 phase AC
Power input (W)	220
Power refrigerating	225
Max current	1.8 A
Protection Index	25
Type of refrigerant	R134A - 190 gr.
Standards	NF EN 60335-1 NF EN 60335-2-49

