




Product Advantages:

- Made of food quality stainless steel.
- Insulation of walls 45 mm rock wool + 20 mm melamine foam.
- Insulation of door 45 mm thick with rock wool. Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels Ø 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Fan-assisted refrigeration controlled by an electronic thermostat with digital readout and the following functions:
- Adjustment range of set value from 0 to 10 °C.
- Possibility of deferred start.
- Dysfunction alarms for cabinet and refrigerated unit maintenance.

Spiral power cable 3G1.5 with moulded plug + plug support.

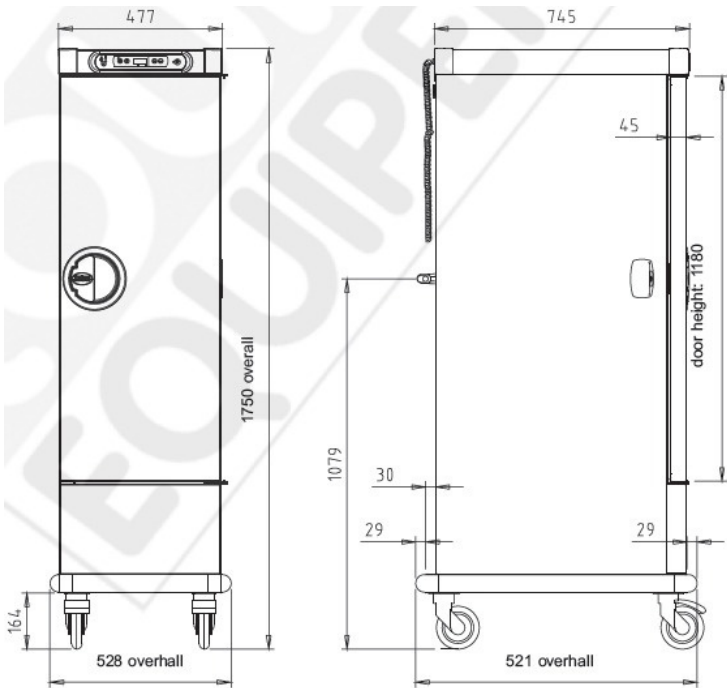

Technical Data:

Loading	15 GN 1/1 ht. 65 mm
Space between sliders	71 mm
External dimensions	528 x 821 x 1750 mm
Internal dimensions	330 x 590 x 1105 mm
External Volume	0.759 m3
Internal Volume	0.215 m3
Weight when empty	104 kg
Max. Loading	120 kg
Voltage	240 1 phase AC - 50 Hz
Power input (W)	230
Max Current (A)	1.8
Power Consumption	0.23 kwh
Protection Index	25
Type of refrigerant	R134A
Power refrigerating	230 W
Standards	NF EN 60335-1 NF EN 60335-2-89

