




Product Advantages:

- Temperature control by precision thermostats with control lamp, main switch and safety temperature limiter.
- Drain valve with key confirmation for safe fat drainage.
- Bottom of the basin with outlet inclination and welded drain valve at the front.
- Easy to clean.
- Deep cold zone under the heating elements to hold suspended particles with precisely fitting fat clarifier.
- Wired completely internally.
- Feet are adjustable in height.

Installation requirements:

- Electrical supply provided by customer.

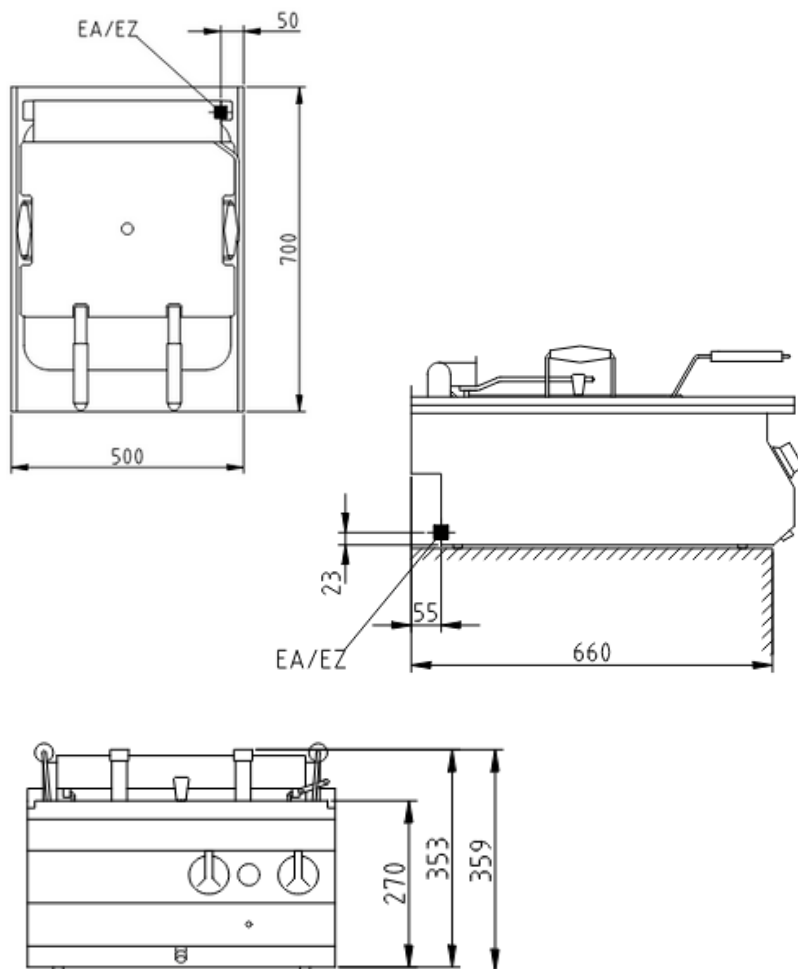

Technical Data:

Width x Height x Depth (mm)	500 x 270 x 700 mm
Effective area	1
Dim.: effect. Area (mm)	180 x 400 x 235
Connected load (electrical) (kW):	20.0
Voltage (V) / EC:	415 3 phase
Recommended fuses (A):	3 x 32
Net weight (kg):	34
Gross weight (kg):	41
Heat emission latent (W):	14000
Heat emission sensitive (W):	1800
Type of protection:	IPX4

