



Product Advantages:

- Housing made completely of stainless steel
- Appliance height only 270mm; more space in substructure.
- U-shaped connection channel, flush with top plate; tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via a drip outlet in the top plate at the front.
- Smoothly polished frying surface made of PowerBlock special sandwich material.
- Appliance with two separate heating zones.
- Steel frying surface 700 x 540 mm.



• Electrical supply provided by customer.

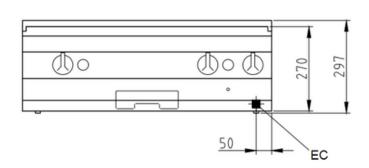

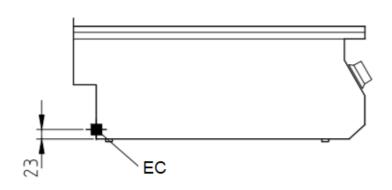





Technical Data:	
Width x Height x Depth	800 x 270 x 700
(mm)	
Effective area	1
Dim.: effect. Area (mm)	700 x 540
Connected load (elect.)	10.8
(kW):	
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 20
Net weight (kg):	80
Gross weight (kg):	89
Heat emission latent (W):	4320
Heat emission sensitive	3564
(W):	
Type of protection:	IPX4









