


Product Advantages:

- Body is buckling resistant and selfsupporting.
- Large radii which are easy to clean.
- · Completely electrically wired inside.
- Temperature control by precision thermostats with control lamp, main switch and safety temperature limiter.
- Ergonomically shaped knobs for a easy identification of the position.
- Removable appliance feet which are adjustable in height.
- Closable fat drain outlet at the front with a removable fat collecting container beneath it.



• Electrical supply provided by customer.



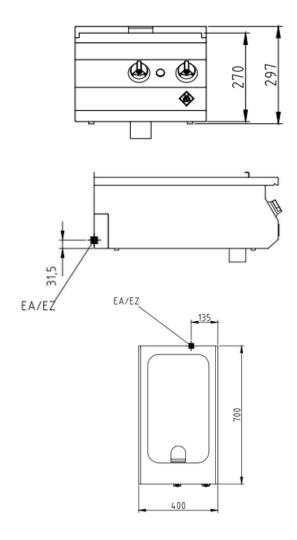

Technical Data:	
Width x Height x Depth (mm)	400 x 270 x 700
Effective Area	1
Dim.: effect. Area (mm)	305 x 510 x 100
Connected load (elect.) (kW):	5.4
Voltage (V):	415 3 phase
Recommended fuses (A):	3 x 20
Nominal capacity (L):	15
Frequency range (Hz):	50/60
Heat emission latent (W):	2160
Heat emission sensitive (W):	1782
Type of protection:	IPX5









