





### Product Advantages:

- Basin 603 x 510 for 2x1/1 gastro norm containers up to 200 mm deep.
- Housing made completely of stainless steel
- Visible surfaces with polished and satin finish, 320 grit.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Very easy to clean because of indirect heating by tubular heating elements, with thermostatic temperature control.
- Integrated appliance switch, control lamp and dry run protection.

### Installation requirements:

- Electrical supply provided by customer.

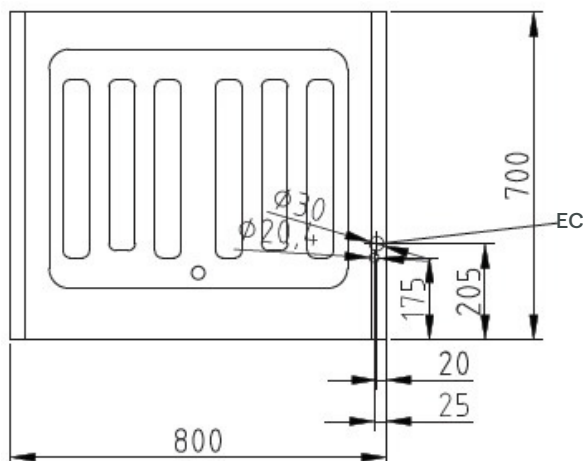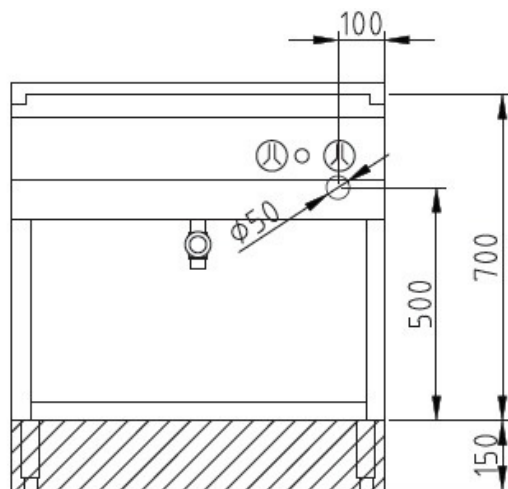

### Technical Data:

Width x Height x Depth (mm)	400 x 700 (900) x 850
Effective area	1
Dim.: effect. Area (mm)	305 x 200 x 510
Connected load (elect.) (kW):	2.0
Voltage (V) / EC:	240 1 phase AC
Recommended fuses (A):	1 x 16
Net weight (kg):	37
Gross weight (kg):	44
Heat emission latent (W):	400
Heat emission sensitive (W):	250
Type of protection:	IPX5

