




### Product Advantages:

- Housing made completely of stainless steel.
- Appliance height only 270mm; more space in substructure.
- U-shaped connection channel, flush with top plate; tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via a drip outlet in the top plate at the front.
- Basin 305 x 510 x 215 mm.
- Removable insert containers GN 1/1 with perforated shelf for large capacities and for keeping hot in a dry condition

### Installation requirements:

- Electrical supply provided by customer.

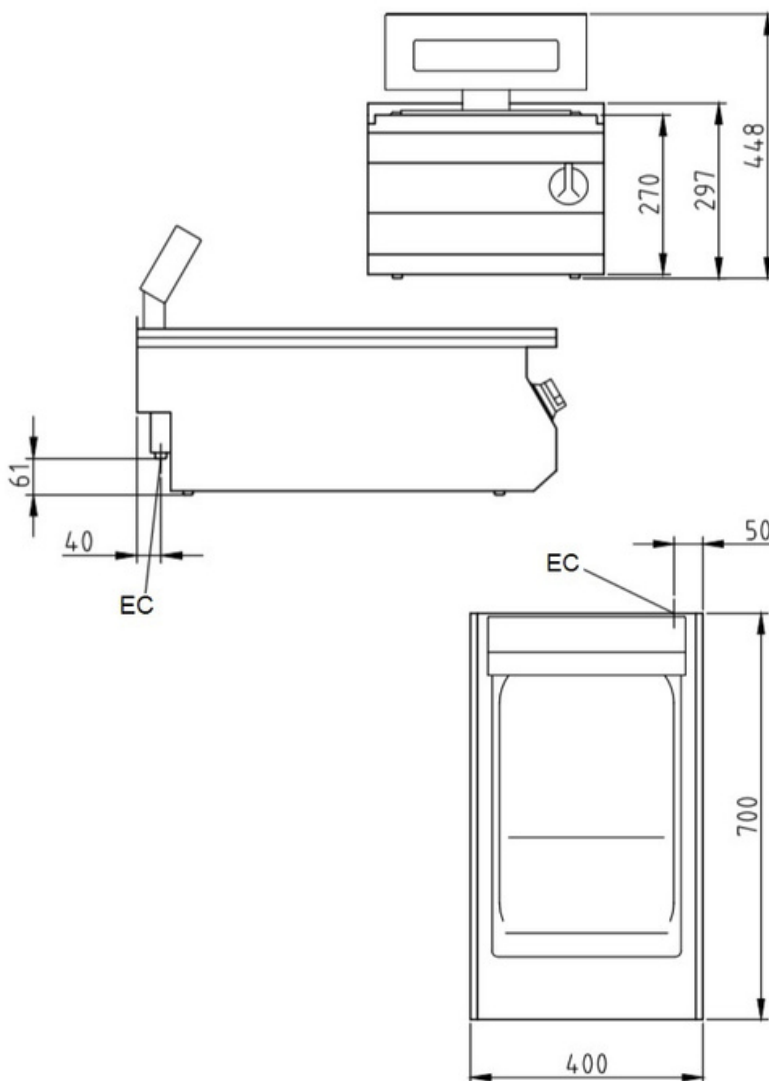

### Technical Data:

Width x Height x Depth (mm)	400 x 270 x 700 mm
Effective area	1
Dim.: effect. Area (mm)	305 x 510mm, 215mm deep
Connected load (electrical) (kW):	1
Voltage (V) / EC:	240 1 phase AC
Recommended fuses (A):	1 x 10
Net weight (kg):	20
Gross weight (kg):	27
Heat emission latent (W):	175
Heat emission sensitive (W):	700
Type of protection:	IPX4

