




### Product Advantages:

- Housing made completely of 304 grade stainless steel.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Ceramic hob 700 x 540 mm.
- Hob with 4 heating zones, 3.5 kW each. Cooking zones 200 mm in diameter.
- Electronic pan size recognition as standard.
- Main switch, induction generator module 200 mm in diameter with control element, contactor, fan, mains connection, IPX5.
- Electric oven: 535 x 520 x 250 mm
- Direct upper heat, indirect lower heat, 50-300°C.
- Internal tubular heating element for upper heat.
- Indirect lower heat controllable by a thermostat, with control lamp, control switch and safety temperature thermostat.
- Accessories: 1 baking tray 1-1/2 GN, 1 CNS grid 1-1/2 GN.

### Installation requirements:

- Electrical supply provided by customer.

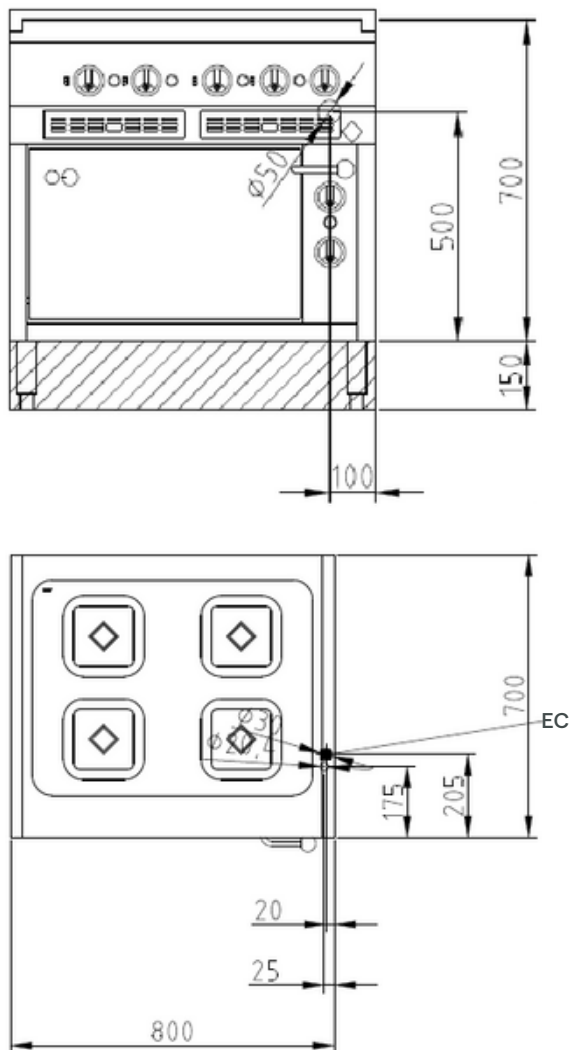

### Technical Data:

Width x Height x Depth (mm)	800 x 700 (900) x 700
Effective area	4
Dim.: effect. Area (mm)	700 x 540
Connected load per zone (kW):	3.5
Connected load peripheral (kW):	4.55
Connected load (elect.) (kW):	18.55
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 25
Heat emission latent (W):	1948
Heat emission sensitive (W):	2572
Type of protection:	IPX5

