


Product Advantages:

- Housing made completely of stainless steel.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Robust ceramic hob 6 mm thick.
- Flush hob with corner radius for easy cleaning.
- Electronic pan size recognition.
- High performance and high efficiency.
- Hob with 4 heating zones.
- Surface induction generator module 280 x 290 mm.

Installation requirements:

• Electrical supply provided by customer.



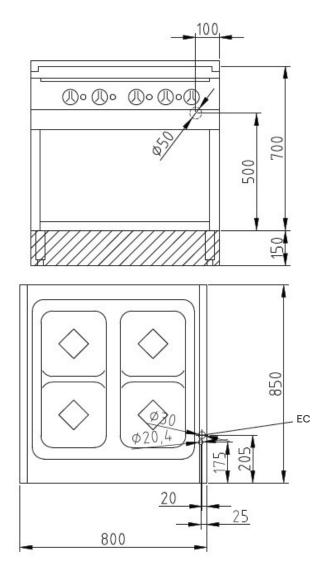

Technical Data:	
Width x Height x Depth (mm)	800 x 700 (900) x 850
Effective area	1
Dim.: effect. Area (mm)	700 x 690
Connected load (elect.) (kW):	20
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Net weight (kg):	98
Gross weight (kg):	111
Heat emission latent (W):	1600
Heat emission sensitive (W):	1400
Type of protection:	IPX5



phoeniks.com.au P- 1300 405 404 E- contact@phoeniks.com.au