




#### Product Advantages:

- Housing made completely of 304 grade stainless steel.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Ceramic hob 700 x 690 mm.
- Hob with 4 heating zones, 5.0 kW each.
- Induction generator module 270 mm in diameter.
- Electronic pan size recognition as standard.
- Main switch, induction generator module 200 mm in diameter with control element, contactor, fan, mains connection, IPX5.
- Electric oven: 535 x 670 x 250 mm.
- Direct upper heat, indirect lower heat, 50-300 °C.
- Internal tubular heating element for upper heat.
- Indirect lower heat controllable by a thermostat, with control lamp, control switch and safety temperature thermostat.
- 1 baking tray 2/1 GN, 1 CNS grid 2/1 GN.

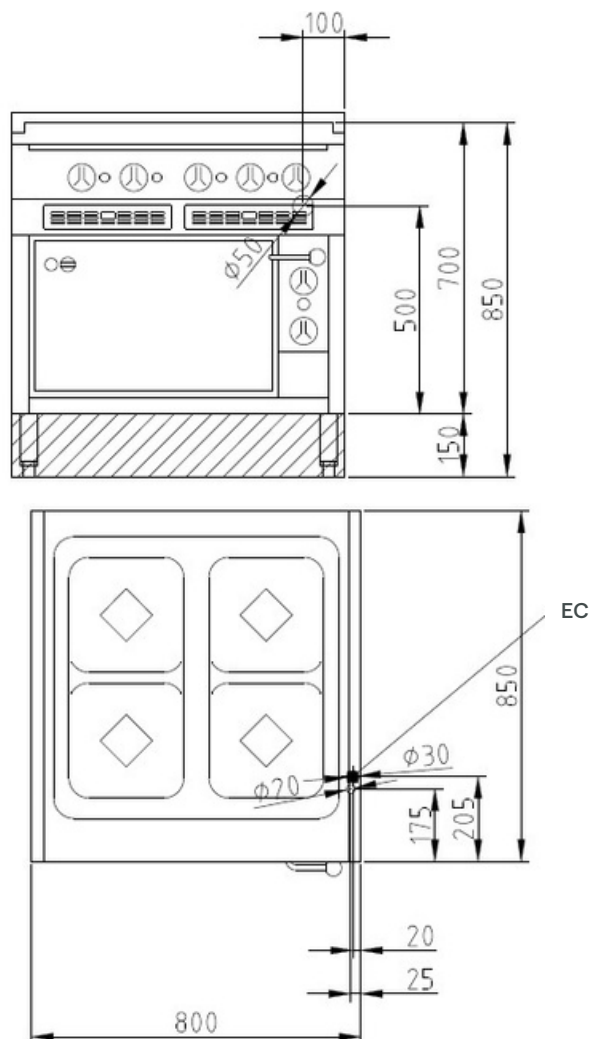

#### Technical Data:

Width x Height x Depth (mm)	800 x 700 (900) x 850
Effective area	1
Dim.: effect. Area (mm)	700 x 690
Connected load (elect.) (kW):	25.4
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 50
Net weight (kg):	146
Gross weight (kg):	159
Heat emission latent (W):	2464
Heat emission sensitive (W):	3290
Type of protection:	IPX5

