





Product Advantages:

- Housing made completely of stainless steel.
- Tightly welded top plate with lateral drain channels for easy cleaning.
- Robust ceramic hob 6 mm thick.
- Flush hob with corner radius for easy cleaning.
- Electronic pan size recognition.
- High performance and high efficiency.
- Ceramic hob with 2 heating zones.
- Surface induction generator module 280 x 290 mm.

Installation requirements:

- Electrical supply provided by customer.

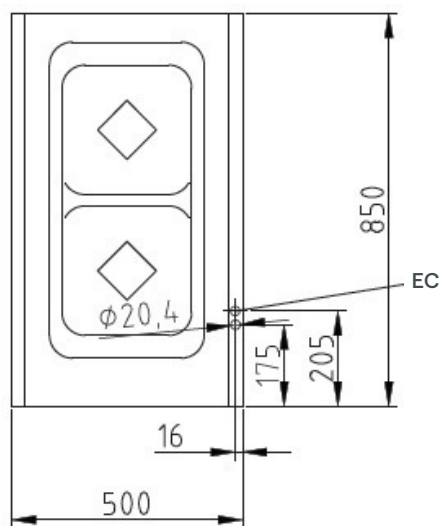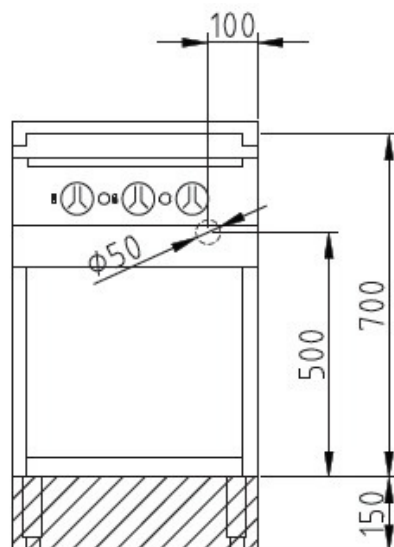

Technical Data:

Width x Height x Depth (mm)	500 x 700 (900) x 850
Effective area	1
Dim.: effect. Area (mm)	340 x 690
Connected load (elect.) (kW):	10
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 20
Net weight (kg):	63
Gross weight (kg):	70
Heat emission latent (W):	800
Heat emission sensitive (W):	700
Type of protection:	IPX5

