

SHELVING

MAY 2023




Proud
of my
equipment



Speed Shelving

YOUR SHELVING LAYOUT SOFTWARE



Easy
to use

For optimum layout of your shelving. Speed Shelving enables you to draw up an estimate for your customer, transform it into an order and prepare the packaging.

EASY TO USE

Intuitive browsing. The parts are predefined, simple set-up for easily modified layouts. Possibility of printing out an estimate and drawing in Excel.

TRACEABILITY

The files are classed and accessible. The quotations can be easily changed, used to place the order and prepare the installation.

RELIABILITY

All the parameters of the room are taken into account: doors, necessary clearance, possible presence of evaporators, recess resulting from grooved plinths.

Available on www.tournus.com




Demonstration video !

SHELVING



Lifetime limited warranty against corrosion



New shelf: Innovative design. Overhanging shelves cover up the upper part of the aluminium bar, for an optimal fit.




Tournus exclusive: there is a space at the edge of the shelves where white board erasable markers can be used to note the contents of the shelf, helps manage the stock of food.




Easy assembly: by tapered self-locking insertion to strengthen the structure.




Load resistance: 200 kg evenly distributed per level.



Modular: in line or corner type assembly.



Easy: 2 hooks per tier whatever the width 400, 500 or 560 mm.



Optimum accessibility: the corner hook does away with the upright so as to store products in the corner. Easy floor cleaning



Stability: adjustable jacks without visible threading (hygienic).

Many accessories: rear protection bar, floor and wall fixing plate, separations.



Shelving entirely recyclable





Flash on our documentation !





**One person alone can assemble 5 metres
in 5 minutes without tools.**

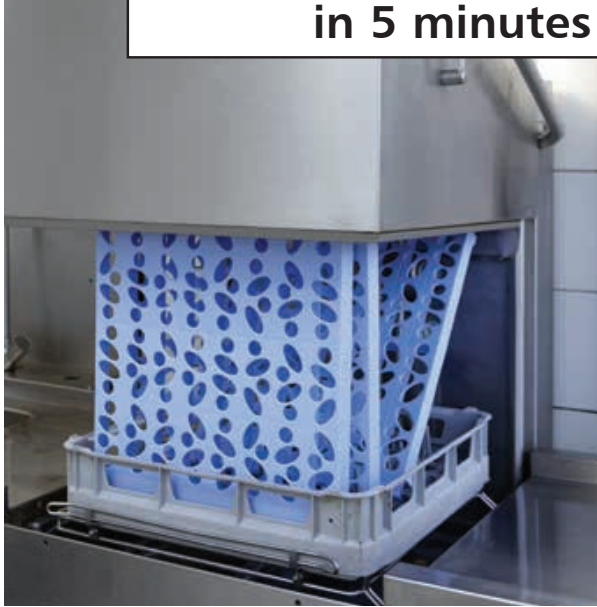

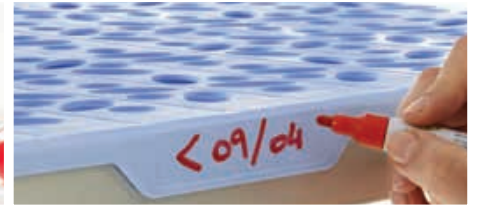


RACKING WITH REMOVABLE SHELVES

Racking with removable shelves consist of shelves and uprights. Rapid assembly process, without tools, by simply snapping into place. Shaped assembly is possible by replacing an upright by corner hooks (2 corner hooks per tier). Load: up to 200 kg by level. NF Hygiene Certified. Operating temperature: -30°C to + 60°C. Shelving is washable in dishwasher (90°C) and fits over the top of the bar: nicer and more stable. It is also possible to write directly on the shelf with an erasable ink pen. Many accessories: Rear protection bar, separations, plates for fixing to the floor and walls.




Removable polypropylene shelves

2 anodised aluminium bars and high density polypropylene shelves.

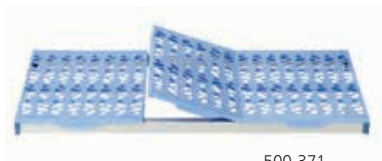

500 371


Lengths (mm)	Width 400 mm		Width 500 mm		Width 560 mm (GN)	
	Ref.	Price	Ref.	Price	Ref.	Price
608	500 366		500 386		500 416	
708	500 367		500 387		500 417	
808	500 368		500 388		500 418	
910	500 369		500 389		500 419	
1010	500 370		500 390		500 420	
1110	500 371		500 391		500 421	
1210	500 372		500 392		500 422	
1312	500 373		500 393		500 423	
1412	500 374		500 394		500 424	
1512	500 375		500 395		500 425	
1612	500 376		500 396		500 426	
1714	500 377		500 397		500 427	



500 471

Removable aluminium shelves

2 anodised aluminium bars and anodised aluminium shelves.

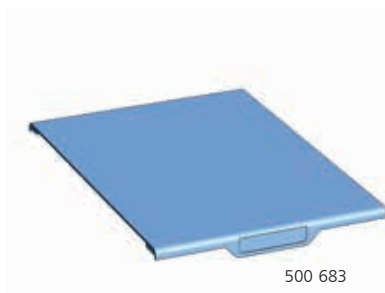

500 683

Lengths (mm)	Width 400 mm		Width 500 mm		Width 560 mm (GN)	
	Ref.	Price	Ref.	Price	Ref.	Price
608	500 466		500 516		500 666	
708	500 467		500 517		500 667	
808	500 468		500 518		500 668	
910	500 469		500 519		500 669	
1010	500 470		500 520		500 670	
1110	500 471		500 521		500 671	
1210	500 472		500 522		500 672	
1312	500 473		500 523		500 673	
1412	500 474		500 524		500 674	
1512	500 475		500 525		500 675	
1612	500 476		500 526		500 676	
1714	500 477		500 527		500 677	

Polypropylene solid shelves

2 anodised aluminium bars and polypropylene solid shelves supprimer anodised aluminium shelves.

Lengths (mm)	Width 400 mm		Width 500 mm	Width 560 mm (GN)	
	Ref.	Price		Ref.	Price
608	500 681		1210	500 687	
708	500 682		1312	500 688	
808	500 683		1412	500 689	
910	500 684		1512	500 690	
1010	500 685		1612	500 691	
1110	500 686		1714	500 692	



- Even more storage capacities.
- Solid shelves and shelves compatible with other models: possibility to mix shelves.

When ordering shelves for extra tiers, include for additional fixing studs.



Consult'Express



Your shipping date



500 124

Uprights

In aluminium with screwed fixing studs determining the number of tiers.

Height 1750 mm	Width 400 mm		Width 500 mm		Width 560 mm (GN)	
	Ref.	Price	Ref.	Price	Ref.	Price
3 tier	<u>500 103</u>		<u>500 123</u>		<u>500 153</u>	
4 tier	<u>500 104</u>		<u>500 124</u>		<u>500 154</u>	
5 tier	<u>500 105</u>		<u>500 125</u>		<u>500 155</u>	

Height 2050 mm	Width 400 mm		Width 500 mm		Width 560 mm (GN)	
	Ref.	Price	Ref.	Price	Ref.	Price
4 tier	<u>500 214</u>		<u>500 224</u>		<u>500 234</u>	
5 tier	<u>500 215</u>		<u>500 225</u>		<u>500 235</u>	
6 tier	<u>500 216</u>		<u>500 226</u>		<u>500 236</u>	



Uprights on wheels*

2 swivel wheels with ball bearings diameter 125 mm polyamid cover including 1 brake. Load maxi 100 kg/level.

Upright Height 1750 mm	Width 400 mm		Width 500 mm		Width 560 mm (GN)	
	Ref.	Price	Ref.	Price	Ref.	Price
3 tier with wheels	-	-	<u>500 133</u>		<u>500 163</u>	
4 tier with wheels	-	-	<u>500 134</u>		<u>500 164</u>	
5 tier with wheels	-	-	<u>500 135</u>		<u>500 165</u>	

* The overall length of an assembly on wheels is increased by 39 mm due to the volume taken up by the bumpers.



500 847

Dunnage rack

2 low uprights + 1 polypropylene shelf.

Description	Overall dim. L x W x H (mm)	Référence	Price
Dunnage rack 1 tier	890 x 500 x 300	<u>500 844</u>	
Dunnage rack 1 tier	1192 x 500 x 300	<u>500 847</u>	
Dunnage rack 1 tier	1494 x 500 x 300	<u>500 850</u>	

Racks can be wined around a corner.




COMPLETE SHELVING WITH **SOLID SHELVES** ON ALL LEVELS

Height 1750 mm - Polypropylene solid shelves



To place an order:
please indicate depth code followed by the overall length required.



Combinations	LINEAR ASSEMBLY				CORNER ASSEMBLY			
	Overall length (mm)	Depth 500 mm			Overall length (mm)	Depth 500 mm		
		3 tier TLD	4 tier TLE	5 tier TLF		3 tier TCD	4 tier TCE	5 tier TCF
608	690				649			
708	790				749			
808	890				849			
910	992				951			
1010	1092				1051			
1110	1192				1151			
1210	1292				1251			
1312	1394				1353			
1412	1494				1453			
1512	1594				1553			
1612	1694				1653			
808+808	1728				1687			
1714	1796				1755			
808+910	1830				1789			
910+910	1932				1891			
910+1010	2032				1991			
1010+1010	2132				2091			
910+1210	2232				2191			
910+1312	2334				2293			
1110+1210	2432				2391			
1210+1210	2532				2491			
1210+1312	2634				2593			
1312+1312	2736				2695			
1210+1512	2834				2793			
1312+1512	2936				2895			
1412+1512	3036				2995			
1512+1512	3136				3095			
1010+1010+1010	3172				3131			
1512+1612	3236				3195			
910+1110+1110	3272				3231			
1612+1612	3336				3295			
1010+1110+1110	3372				3331			
1612+1714	3438				3397			
1010+1110+1210	3472				3431			
1714+1714	3540				3499			
1110+1110+1210	3572				3531			
1110+1110+1312	3674				3633			
1210+1210+1210	3772				3731			
910+910+910+910	3812				3771			
1110+1312+1312	3876				3835			
910+910+910+1010	3912				3871			
1210+1312+1312	3976				3935			
1312+1312+1312	4078				4037			
1312+1312+1412	4178				4137			
1312+1312+1512	4278				4237			
1412+1412+1412	4378				4337			
1312+1512+1512	4478				4437			
1412+1512+1512	4578				4537			
1110+1110+1110+1110	4612				4571			
1312+1612+1612	4678				4637			
1110+1110+1110+1210	4712				4671			
1512+1512+1612	4778				4737			
1110+1110+1110+1312	4814				4773			
1512+1612+1612	4878				4837			
1110+1110+1210+1312	4914				4873			
1612+1612+1612	4978				4937			

COMBINED SETS: SOLID SHELVES AND PERFORATED SHELVES

Height 1750 mm - Polypropylene shelves





The lower level is composed of solid shelves and the other levels consist of perforated shelves
To place an order: please indicate depth code followed by the overall length required.



Solid shelf protects products from moisture when cleaning the floor.



Combinations	LINEAR ASSEMBLY				CORNER ASSEMBLY			
	Overall length (mm)	Depth 500 mm			Overall length (mm)	Depth 500 mm		
		3 tier MLD	4 tier MLE	5 tier MLF		3 tier MCD	4 tier MCE	5 tier MCF
608	690				649			
708	790				749			
808	890				849			
910	992				951			
1010	1092				1051			
1110	1192				1151			
1210	1292				1251			
1312	1394				1353			
1412	1494				1453			
1512	1594				1553			
1612	1694				1653			
808+808	1728				1687			
1714	1796				1755			
808+910	1830				1789			
910+910	1932				1891			
910+1010	2032				1991			
1010+1010	2132				2091			
910+1210	2232				2191			
910+1312	2334				2293			
1110+1210	2432				2391			
1210+1210	2532				2491			
1210+1312	2634				2593			
1312+1312	2736				2695			
1210+1512	2834				2793			
1312+1512	2936				2895			
1412+1512	3036				2995			
1512+1512	3136				3095			
1010+1010+1010	3172				3131			
1512+1612	3236				3195			
910+1110+1110	3272				3231			
1612+1612	3336				3295			
1010+1110+1110	3372				3331			
1612+1714	3438				3397			
1010+1110+1210	3472				3431			
1714+1714	3540				3499			
1110+1110+1210	3572				3531			
1110+1110+1312	3674				3633			
1210+1210+1210	3772				3731			
910+910+910+910	3812				3771			
1110+1312+1312	3876				3835			
910+910+910+1010	3912				3871			
1210+1312+1312	3976				3935			
1312+1312+1312	4078				4037			
1312+1312+1412	4178				4137			
1312+1312+1512	4278				4237			
1412+1412+1412	4378				4337			
1312+1512+1512	4478				4437			
1412+1512+1512	4578				4537			
1110+1110+1110+1110	4612				4571			
1312+1612+1612	4678				4637			
1110+1110+1110+1210	4712				4671			
1512+1512+1612	4778				4737			
1110+1110+1110+1312	4814				4773			
1512+1612+1612	4878				4837			
1110+1110+1210+1312	4914				4873			
1612+1612+1612	4978				4937			

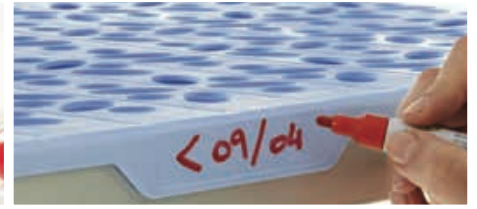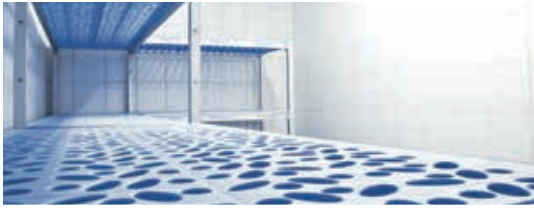

123 014



500 817



800 711



500 813



118 728



120 797




Separations



Rear protection bar




Pan under shelving

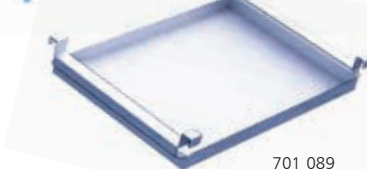


701 089



230 653



124 534



230 656

ACCESSORIES

Description	Reference	Price
Corner unit	<u>123 014</u>	
Supplementary stud (each)	<u>800 711</u>	
1/1 GN pan holder with tray runners (34 mm height gap between)	<u>500 817</u>	
Hook-on label -holder	<u>500 813</u>	
Floor fixing plate	<u>118 728</u>	
Wall fixing plate	<u>120 797</u>	
Separation width 400 mm (per pair)	<u>500 814</u>	
Separation width 500 mm (per pair)	<u>500 815</u>	
Separation width 560 mm (per pair)	<u>500 816</u>	
Rear protection bar, length 808 mm	<u>500 783</u>	
Rear protection bar, length 910 mm	<u>500 784</u>	
Rear protection bar, length 1010 mm	<u>500 785</u>	
Rear protection bar, length 1110 mm	<u>500 786</u>	
Rear protection bar, length 1210 mm	<u>500 787</u>	
Rear protection bar, length 1312 mm	<u>500 788</u>	
Rear protection bar, length 1412 mm	<u>500 789</u>	
Rear protection bar, length 1512 mm	<u>500 790</u>	
Rear protection bar, length 1612 mm	<u>500 791</u>	
Rear protection bar, length 1714 mm	<u>500 792</u>	
Drip container for racking with shelves, height 40 mm, the linear meter	<u>701 089</u>	
Polypropylene grids W 397 x L 300 mm	<u>230 643</u>	
Polypropylene grids W 397 x L 400 mm	<u>230 644</u>	
Polypropylene grids W 497 x L 300 mm	<u>230 653</u>	
Polypropylene grids W 497 x L 400 mm	<u>230 654</u>	
Polypropylene grids W 567 x L 300 mm	<u>230 663</u>	
Polypropylene grids W 567 x L 400 mm	<u>230 664</u>	
Anodised aluminium grids W 397 x L 300 mm	<u>124 532</u>	
Anodised aluminium grids W 397 x L 400 mm	<u>124 533</u>	
Anodised aluminium grids W 497 x L 300 mm	<u>124 534</u>	
Anodised aluminium grids W 497 x L 400 mm	<u>124 535</u>	
Anodised aluminium grids W 567 x L 300 mm	<u>124 536</u>	
Anodised aluminium grids W 567 x L 400 mm	<u>124 537</u>	
Polypropylene solid grids W 497 x L 300 mm	<u>230 655</u>	
Polypropylene solid grids W 497 x L 400 mm	<u>230 656</u>	



Consult'Express




Your shipping date

MOBILE SHELVING WITH GUIDANCE RAIL


Combinations made up of 2 fixed shelving units placed on the ends connected by 2 guide bars fixed on the upper sides. In the middle, several shelves are arranged on fixed wheels turned to the inside, which can slide freely. 5 tier shelving, height 2050 mm, with polypropylene removable shelves. The unit length varies from 2.5 m to 6 metres. A minimum access space of 80 cm must be provided between the shelvings. Load maxi 100 kg/level.

To place an order, please provide a plan of the room, indicating the position of the shelving, the location of the doors and any existing evaporators.

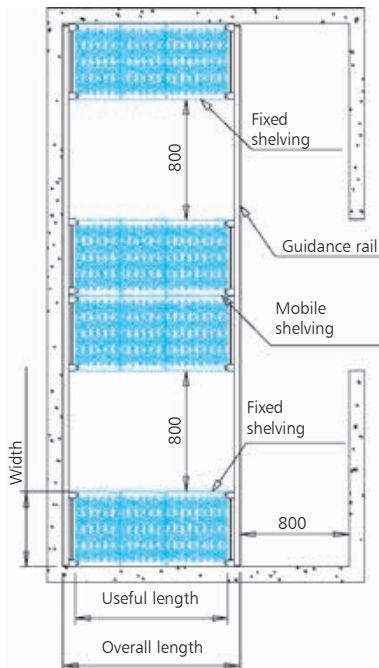

Description	Length (mm)	Overall length (mm)	Depth 500 mm		Depth 560 mm	
			Ref.	Price	Ref.	Price
2 guidance rails, linear metre*			604 900		604 901	
Fixed shelving	1010	1150	PLN 1150 MF		PLQ 1150 MF	
Fixed shelving	1210	1350	PLN 1350 MF		PLQ 1350 MF	
Fixed shelving	1412	1552	PLN 1552 MF		PLQ 1552 MF	
Shelving on wheels	1010	1150	PLN 1150 MR		PLQ 1150 MR	
Shelving on wheels	1210	1350	PLN 1350 MR		PLQ 1350 MR	
Shelving on wheels	1412	1552	PLN 1552 MR		PLQ 1552 MR	

* Please specify the length (minimum 2.50 metres, maximum 6 metres)



Crosspiece of reinforcement on every mobile upright



PALLETS

Stackable polyethylene pallets, food quality. Maximum load (static): 4 tons (reference 806 105), 500 kg (reference 806 106).




806 106

Description	Overall dimensions W x l (mm)	Reference	Price
Polyethylene pallet, grey flat base	1200 x 800	<u>806 105</u>	
Polyethylene pallet, black slatted base	1200 x 800	<u>806 106</u>	



Anodised aluminium grid

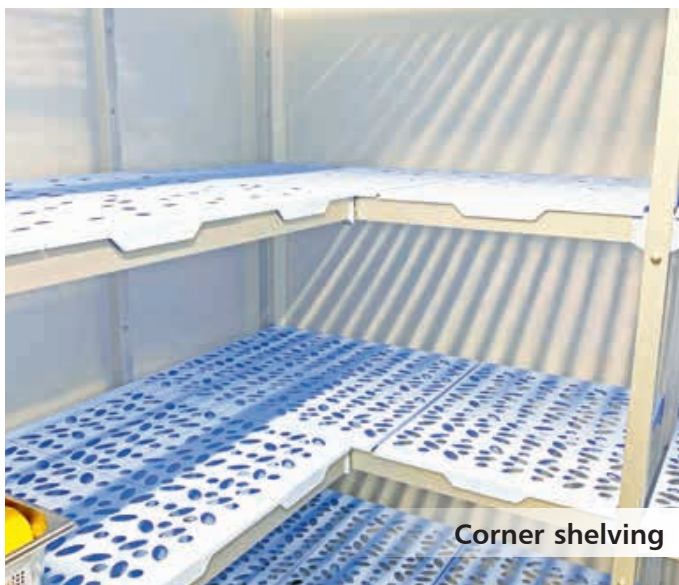

Corner shelving



Linear shelving



Consult'Express



Your shipping date

RACKING UNITS



805 711

Racking units with s/steel tubes

Stainless steel welded construction. Height 1800 mm. Uprights made in tubes 30 x 30 mm. 4 shelves in tubes 25 x 25 mm. Load: 200 kg per level (with a maximum of 400 kg for all the wheels).

Racking units include 4 adjustable feet, racking units on wheels are equipped with 4 wheels Ø 125 mm including 2 with brakes.

Description	Overall dim. W x l (mm)	Racking units on legs	Racking units on wheels
Racking units, 4 levels	600 x 1000	<u>805 710</u>	<u>825 710</u>
Racking units, 4 levels	600 x 1400	<u>805 711</u>	<u>825 711</u>
Racking units, 4 levels	600 x 1800	<u>805 712</u>	<u>825 712</u>



ALH 1192


Racking units with aluminium shelves

Racking units made in anodised aluminium. Easy assembly by tapered self-locking insertion without tools. Load: up to 150 kg per level.

Certification NF-Hygiene Alimentaire.


Description	Overall dim. W. x l (mm)	Reference	Price
Racking unit 3 levels	560 x 1200	<u>ALG 1192</u>	
Racking unit 4 levels	560 x 1200	<u>ALH 1192</u>	
Racking unit 3 levels	560 x 1500	<u>ALG 1494</u>	
Racking unit 4 levels	560 x 1500	<u>ALH 1494</u>	



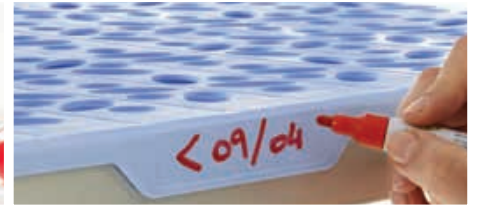

RACKING WITH TRAYS

Racking shelves are made of tubes and either solid or perforated trays. Height adjustment is facilitated by markers engraved on the tube. Load: 200 kg by level. Hygiene Certified.

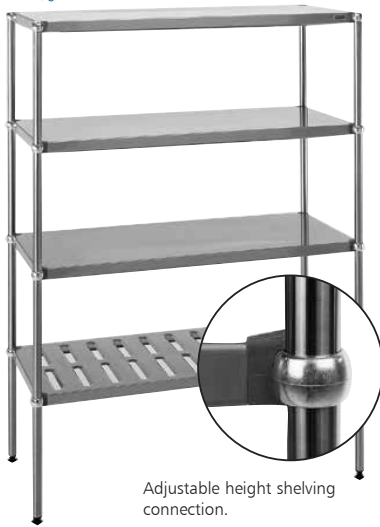

Adjustable height shelving connection.

Trays

Dimensions (mm)	ALUMINIUM		STAINLESS STEEL			
	Solid trays		Solid trays		Perforated trays	
	Ref.	Price	Ref.	Price	Ref.	Price
A 610 x 400	805 611					
D 715 x 400	805 618					
F 930 x 400	805 614					
B 1150 x 400	805 612					
E 1255 x 400	805 619					
C 1365 x 400	805 613					
A 610 x 500	805 651		805 671		805 681	
D 715 x 500	805 658		805 678		805 688	
F 930 x 500	805 660		805 680		805 687	
B 1150 x 500	805 652		805 672		805 682	
E 1255 x 500	805 659		805 679		805 689	
C 1365 x 500	805 653		805 673		805 683	
A 610 x 650	805 654		805 674			
B 1150 x 650	805 655		805 675			
C 1365 x 650	805 656		805 676			



Uprights

Description	Reference	Price
Stainless steel tube height 1780 mm Ø 32 mm with jack	805 677	



Consult'Express



Your shipping date

4 TIER COMBINATIONS

Combinations of elements consisting 4 trays and 4 tubes (positioned side by side). The table below indicates the more cost effective price combinations. Each column is identified by a 2 letters prefix (EA, EC, ED...).

To place an order: please indicate depth code followed by the overall length required.



- Module A.....Overall length 655 mm
- Module D.....Overall length 760 mm
- Module FOverall length 975 mm
- Module BOverall length 1195 mm
- Module EOverall length 1300 mm
- Module C.....Overall length 1410 mm

Overall length (mm)	Combinations	Width 400 (overall 445 mm)		Width 500 (overall 545 mm)		Width 650 mm (overall 695 mm)	
		Aluminium trays with s/steel tubes		Aluminium trays with s/steel tubes		S/steel trays and tubes	
		Solid trays EA	Solid trays EC	Solid trays ED	Perforated trays EE	Aluminium trays with s/steel tubes Solid trays EF	S/steel trays and tubes Solid trays EG
655	A						
760	D						
975	F						
1195	B						
1300	E						
1410	C						
1520	2D						
1630	A+F						
1735	D+F						
1850	A+B						
1950	2F						
2065	A+C						
2170	B+F						
2275	E+F						
2385	C+F						
2495	B+E						
2605	2F+A						
2710	C+E						
2820	2C						
2925	3F						
3045	2B+A						
3150	2B+D						
3250	2F+E						
3365	2B+F						
3470	B+E+F						
3585	3B						
3690	2B+E						
3795	2C+F						
3900	3E						
4015	2C+B						
4120	2C+E						
4230	3C						
4335	C+3F						
4450	2B+E+D						
4560	3B+F						
4665	2B+E+F						
4770	2C+2F						
4885	3B+E						
4995	3B+C						
5095	3E+B						