



Technical Data:	
Dimensions	997 x 1060 x 799 mm
Connected Load	15.9 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 32 A
Frequency Range	50 Hz
Soft Water Connection	DN 20 (R 3/4" inside)
Water Connection	DN 20 (R 3/4" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	10 (max. 65 mm deep)
FlexiRack® (530 x 570 mm)	10 (max. 65 mm deep)
Plates Ø 28 cm on FlexiRack® grid & Plates Ø 32 cm – plate trolley	40
Gross Weight	180 kg
Heat Emission Latent	2862 W
Heat Emission Sensitive	1908 W

Product Description:


- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- FlexiRack® – 50% more cooking capacity.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View

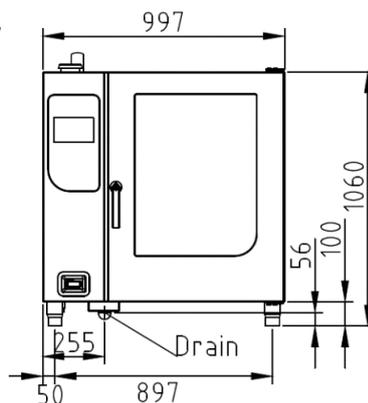

Side View

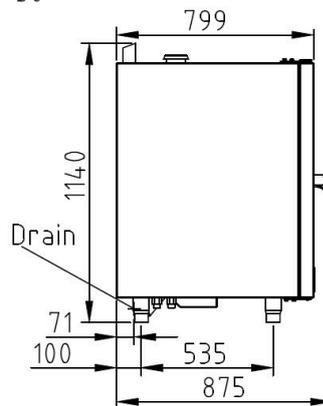

Top View

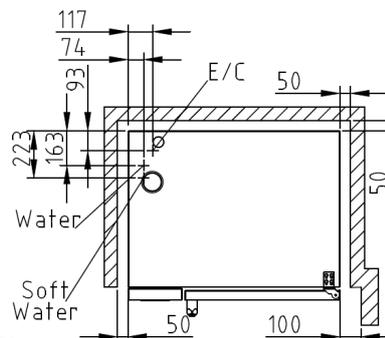

Accessories:

