



Technical Data:	
Dimensions	550 x 819 x 611 mm
Connected Load	5.2 or 3.5 kW
Voltage	415 3 Phase AC or 240 1 Phase AC
Recommended Fuses	3 x 20 or 1 x 15 A
Frequency	50 Hz
Soft Water Connection	DN 20 (R 3/4" inside)
Water Connection	DN 20 (R 3/4" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 40
Gastronorm 1/1 (530 x 325 mm)	6 (max. 60 mm deep)
Plates Ø 28 cm	6
Material Housing	1.4301
Material Cooking chamber	1.4301
Net Weight	68 kg
Heat Emission Latent	936 / 630 W
Heat Emission Sensitive	624 / 420 W

Product Description:

- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- Hygienic rounded corners and cooking chamber door with insulated triple glazing.
- RackControl – Multi-timer.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- High speed centrifugal steam generation technology with heat recovery.
- ClimaSelect – Humidity and temperature control measurement.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.


Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View

Side View

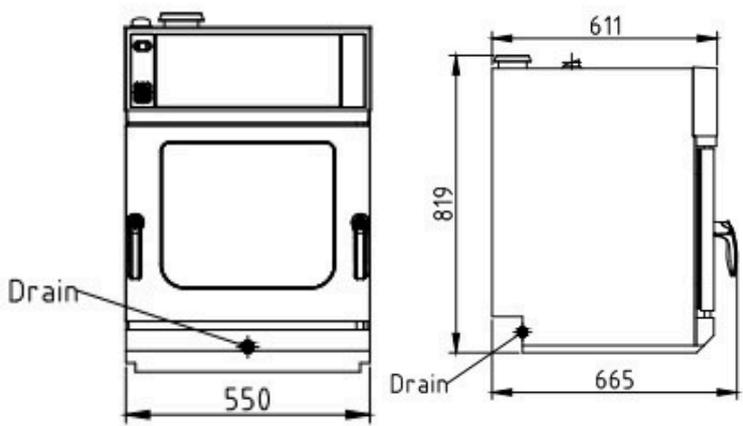

Top View

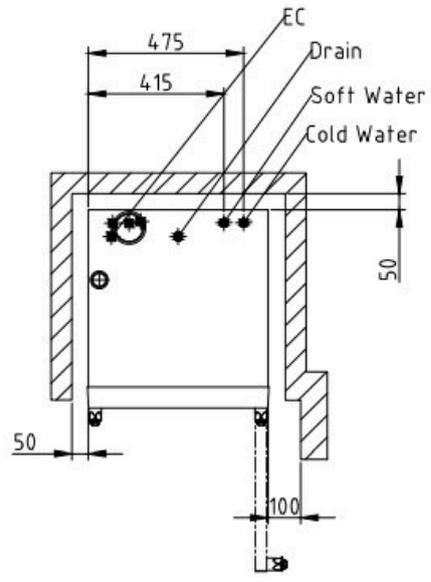

Optional Accessories:

