



Technical Data:

Dimensions	570 x 1261 x 855 mm
Connected Load	7.8 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 20 A
Frequency	50 Hz
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 40
Gastronorm 1/1 (530 x 325 mm)	6 (max. 65 mm deep)
Plates Ø 28 cm	12
Gross Weight	80 kg
Heat Emission Latent	1404 W
Heat Emission Sensitive	936 W

Product Description:

- ClimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps & USB interface available.
- 316 S 11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- EasyIn roll-in system for transport trolley racks to compensate for any unevenness of the floor up to 10 mm.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system
- 3 years warranty parts and labour.

Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

Accessories:



Front View

Side View

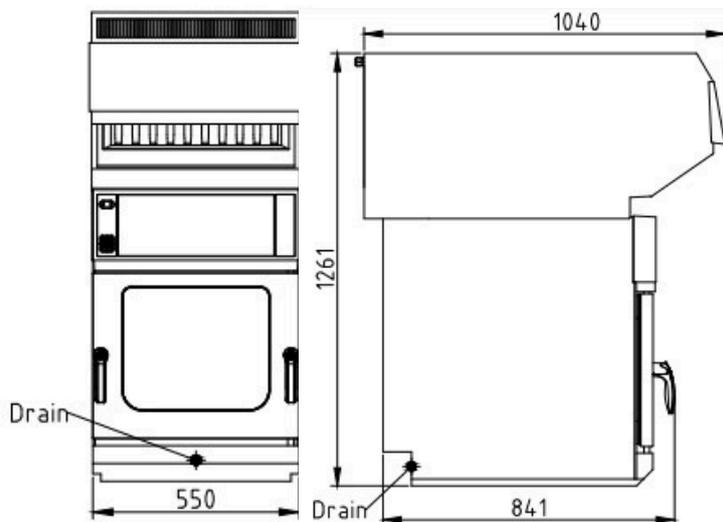

Top View

