



Technical Data:	
Dimensions	600 x 520 x 445 mm
Electronic Timer	0 to 20 Minutes
Sensible Heat Emission	2.80 kW
Latent Heat Emission	0.70 kW
Connected Load	4.6 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 20 A
Frequency	50 Hz

Product Description:


- Compact – Can be used in many areas.
- Automatic plate detection – Switchable clever function. Due to the quick heating systems, you will save precious energy. Up to 70 % reduced power consumption with the Salvis plate detection.
- Reflector – The head reflector is equipped with a patented double coat and a smart heating system; it prevents high temperatures on the reflector handle.
- Timer – The device will automatically switch off after the desired gratination time.
- Operation – Three operating modes to choose from. Manual, semi-automatic and fully automatic.
- Hygiene – High-quality workmanship, large radii and foldable plate rest.
- Heating systems – Fast HiLight heater (HL).

Options:


- Wall mounting set
- Mounting over ranges.



Front View

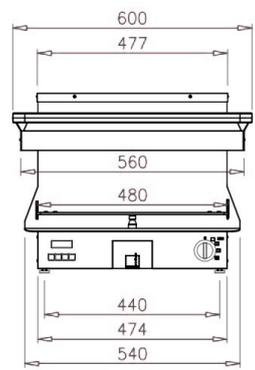

Side View

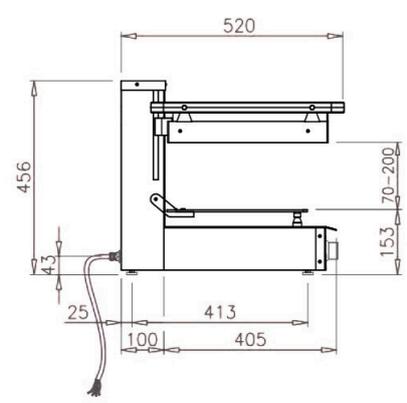

Top View

