PHOENIKS

FlexiCombi Classic Maxi 20.2 Electric
Product Reference: FKE202R_CL

Technical Data:	
Dimensions	1115 x 1960 x 999 mm
Connected Load	60.9 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 100 A
Frequency Range	50 Hz
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	40 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm)	20 (max. 65 mm deep)
Plates Ø 28 cm	120
Plates Ø 32 cm - plate trolley	80
Gross Weight	375 kg
Heat Emission Latent	10608 W
Heat Emission Sensitive	7072 W

Product Description:

- ClimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps & USB interface.
- 316 S 11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- EasyIn roll-in system for transport trolley racks to compensate for any unevenness of the floor up to 10 mm.
- Handshower.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

Front View

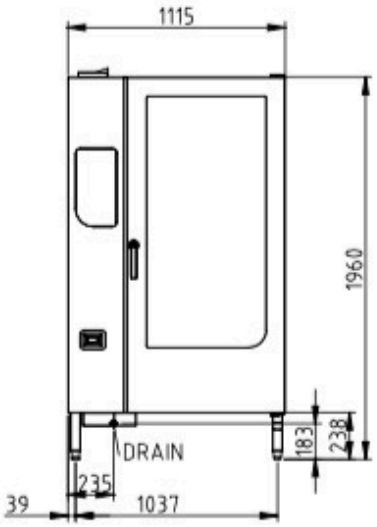

Side View

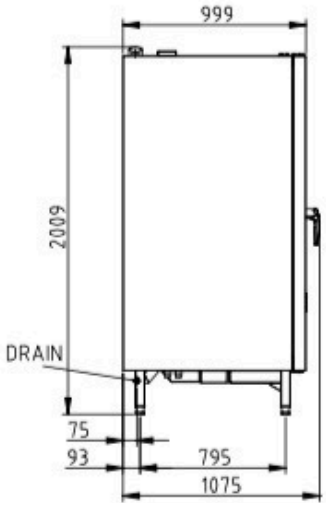

Top View

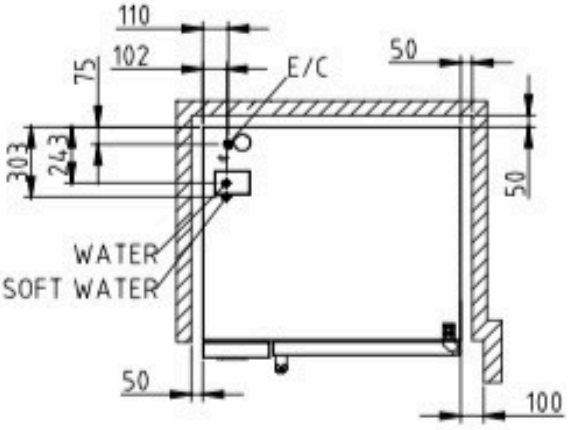

Accessories:

phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au