

25 avenue Jean Moulin
BP59
71700 TOURNUS - FRANCE

France :

Tél : 03 85 27 42 42

E-mail :
commercial@tournus.com

Export :
Tél : + 33 (0)3 85 27 42 65

E-mail :
export@tournus.com

Website :
www.tournus.com

Racking with removable shelves consist of shelves and uprights. Rapid assembly process, without tools, by simply snapping into place. Shaped assembly is possible by replacing an upright by corner hooks (2 corner hooks per tier). Load: up to 200 kg by level.

NF Hygiene Certified. Operating temperature: -30°C to + 60°C. Shelving is washable in dishwasher (90°C) and fits over the top of the bar: nicer and more stable. It is also possible to write directly on the shelf with an erasable ink pen. Many accessories: Rear protection bar, separations, plates for fixing to the floor and walls.


THE
TOURNUS
ASSET

- Even more storage capacities.
- Solid shelves and shelves compatible with other models: possibility to mix shelves.

Removable polypropylene shelves

2 anodised aluminium bars and high density polypropylene shelves.

Lengths (mm)	Width 400 mm	Width 500 mm	Width 560 mm (GN)
608	<u>500 366</u>	<u>500 386</u>	<u>500 416</u>
708	<u>500 367</u>	<u>500 387</u>	<u>500 417</u>
808	<u>500 368</u>	<u>500 388</u>	<u>500 418</u>
910	<u>500 369</u>	<u>500 389</u>	<u>500 419</u>
1010	<u>500 370</u>	<u>500 390</u>	<u>500 420</u>
1110	<u>500 371</u>	<u>500 391</u>	<u>500 421</u>
1210	<u>500 372</u>	<u>500 392</u>	<u>500 422</u>
1312	<u>500 373</u>	<u>500 393</u>	<u>500 423</u>
1412	<u>500 374</u>	<u>500 394</u>	<u>500 424</u>
1512	<u>500 375</u>	<u>500 395</u>	<u>500 425</u>
1612	<u>500 376</u>	<u>500 396</u>	<u>500 426</u>
1714	<u>500 377</u>	<u>500 397</u>	<u>500 427</u>



500 371

Removable aluminium shelves

2 anodised aluminium bars and anodised aluminium shelves.

Lengths (mm)	Width 400 mm	Width 500 mm	Width 560 mm (GN)
608	<u>500 466</u>	<u>500 516</u>	<u>500 666</u>
708	<u>500 467</u>	<u>500 517</u>	<u>500 667</u>
808	<u>500 468</u>	<u>500 518</u>	<u>500 668</u>
910	<u>500 469</u>	<u>500 519</u>	<u>500 669</u>
1010	<u>500 470</u>	<u>500 520</u>	<u>500 670</u>
1110	<u>500 471</u>	<u>500 521</u>	<u>500 671</u>
1210	<u>500 472</u>	<u>500 522</u>	<u>500 672</u>
1312	<u>500 473</u>	<u>500 523</u>	<u>500 673</u>
1412	<u>500 474</u>	<u>500 524</u>	<u>500 674</u>
1512	<u>500 475</u>	<u>500 525</u>	<u>500 675</u>
1612	<u>500 476</u>	<u>500 526</u>	<u>500 676</u>
1714	<u>500 477</u>	<u>500 527</u>	<u>500 677</u>




500 471

Polypropylene solid shelves

2 anodised aluminium bars and polypropylene solid shelves supprimer anodised aluminium shelves.

Lengths (mm)	Width 400 mm	Width 500 mm	Width 560 mm (GN)
608	<u>500 681</u>	1210	<u>500 687</u>
708	<u>500 682</u>	1312	<u>500 688</u>
808	<u>500 683</u>	1412	<u>500 689</u>
910	<u>500 684</u>	1512	<u>500 690</u>
1010	<u>500 685</u>	1612	<u>500 691</u>
1110	<u>500 686</u>	1714	<u>500 692</u>



500 683

Recommended for the first level to protect food from splashes.

When ordering shelves for extra tiers, include for additional fixing studs.

RC Mâcon B 383 567 104
Code APE 295 E
SAS Capital 16 355 625 €

25 avenue Jean Moulin
BP59
71700 TOURNUS - FRANCE

France :

Tél : 03 85 27 42 42

E-mail :
commercial@tournus.com

Export :

Tél : + 33 (0)3 85 27 42 65

E-mail :
export@tournus.com

Website :
www.tournus.com

RC Mâcon B 383 567 104
Code APE 295 E
SAS Capital 16 355 625 €

Uprights

In aluminium with screwed fixing studs determining the number of tiers.

Height 1750 mm	Width 400 mm	Width 500 mm	Width 560 mm (GN)
3 tier	<u>500 103</u>	<u>500 123</u>	<u>500 153</u>
4 tier	<u>500 104</u>	<u>500 124</u>	<u>500 154</u>
5 tier	<u>500 105</u>	<u>500 125</u>	<u>500 155</u>

Height 2050 mm	Width 400 mm	Width 500 mm	Width 560 mm (GN)
4 tier	<u>500 214</u>	<u>500 224</u>	<u>500 234</u>
5 tier	<u>500 215</u>	<u>500 225</u>	<u>500 235</u>
6 tier	<u>500 216</u>	<u>500 226</u>	<u>500 236</u>

Upright on wheels

2 swivel wheels with ball bearings diameter 125 mm polyamid cover including 1 brake. Load maxi 100 kg/level.


Upright height 1750 mm	Width 500 mm	Width 560 mm (GN)
3 tier with wheels	<u>500 133</u>	<u>500 163</u>
4 tier with wheels	<u>500 134</u>	<u>500 164</u>
5 tier with wheels	<u>500 135</u>	<u>500 165</u>

The overall length of an assembly on wheels is increased by 39 mm due to the volume taken up by the bumpers.


Dunnage rack

2 low uprights + 1 polypropylene shelf.

Description	Overall dim. LxWxH (mm)	Référence
Dunnage rack 1 tier	890x500x300	<u>500 844</u>
Dunnage rack 1 tier	1192x500x300	<u>500 847</u>
Dunnage rack 1 tier	1494x500x300	<u>500 850</u>
Dunnage rack 1 tier	890x560x300	<u>500 854</u>
Dunnage rack 1 tier	1192x560x300	<u>500 857</u>
Dunnage rack 1 tier	1494x560x300	<u>500 860</u>

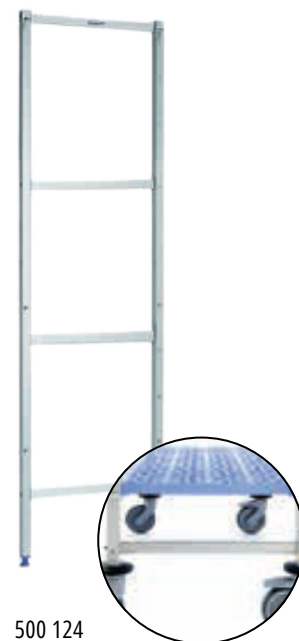

500 124

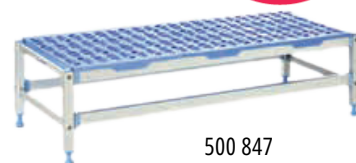

500 847