



PHOENIKS

Flexi Combi Magic Pilot 6.2 + 6.2 Electric

Product Reference: TKE062-062

Technical Data:

Dimensions	997 x 1700 x 799 mm
Connected Load	2 x 20.9 kW
Voltage	each 415 3 Phase AC
Recommended Fuses	each 3 x 32 A
Frequency Range	each 50 Hz
Soft Water Connection	2 x DN 20 (R ¾" inside)
Water Connection	2 x DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	2 x DN 50
Gastronorm 1/1 (530 x 325 mm)	2 x 12 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm)	2 x 6 (max. 65 mm deep)
Plates Ø 28 cm	each 24
Plates Ø 32 cm - plate trolley	each 22
Gross Weight	320 kg
Heat Emission Latent	each 3670 W
Heat Emission Sensitive	each 2450 W

Product Description:

- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- EasyIn roll-in system for transport trolley racks for any unevenness of the floor up to 10 mm.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy & Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View



Side View

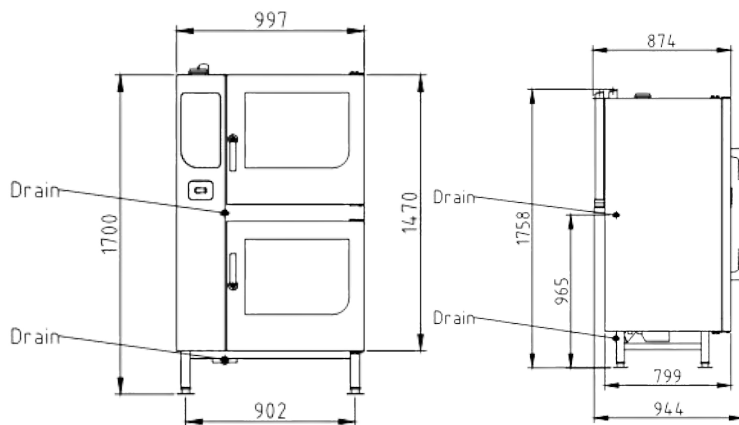

Top View

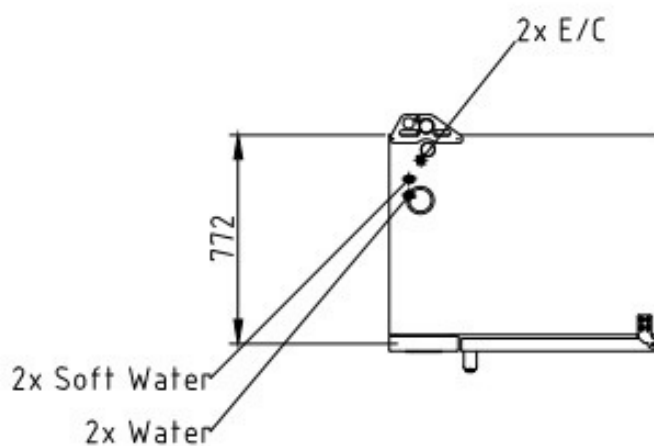

Accessories:



phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au