



Technical Data:	
Dimension (WxDxH)	930 x 595 x 1418 mm
Docking station + shuttle length	1360 mm
Buffer height	1080 mm
Gross weight	136 kg
Voltage	415 V three phase AC
Frequency	50 Hz
Power	7800 W
Recomended Fuses	3 x 16 A
Protection Level	IPX 4

Product Description:

- High-performance temperature regulation with forced and directed air convection technology
- Thermoformed ABS top hood and back panels
- Digital touchscreen control panel, count time reheating, traffic light to report alarms, A one-button start & stop cycle, clock
- Access to programming
- Automatic Cart locking system
- Mobile docking station with 4 swivel castors diameter 125 mm, 2 with brake (Zinc-plated steel)
- Removable gaskets
- Cart disconnecting switch
- Manual disconnecting device for cart/docking station in case of extended power cut
- Air baffle made of stainless steel
- USB port - Standard Temperature Traceability

Installation requirements:

- Electrical supply provided by customer.

Included Accessory:

- 2 meter long power supply cable

Options:


- SOCONNECT : 360° overview online traceability platform



Front View



Side View

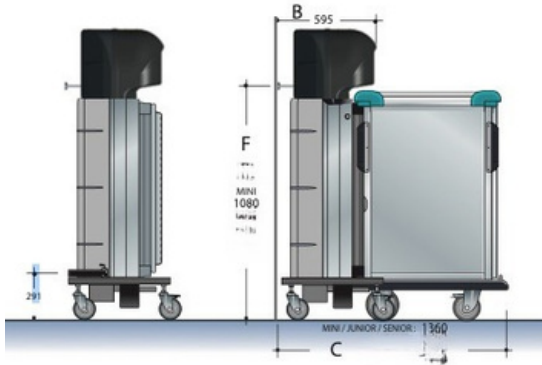

Top View

