



Technical Data:

Shuttle (WxDxH)	795 x 920 x 1380 mm
Net weight	197 kg
Maximum Load	160 kg
Number of levels	11 + 12
Maximum Number of trays	23
Pitch between levels	78 mm
Push/Pull/Motion	2.5 / 2.5 / 1.5 daN

Product Description:


- Stainless Steel inside and outside structure, mounted on frame
- Non-marking bumper rotomoulded one piece
- Stainless Steel anti-fall top side rail
- Insulated doors opening at 270° with safety open position lock
- 2 x Door latches + Vertical Ergonomic handles
- Interchangeable door seals
- Chamber with insulated middle wall with automatic air dams and removable racks
- 2 x fixed wheels D200mm + 2 x Swivel wheels D160mm (Zinc-plated steel)
- Guiding and catching roller
- 4 Protective bumpers with integrated handles
- No on-board technology, no heating or regulation element
- Flat top with Anti Fall side rail
- Meal Service based on the direction of traffic in the corridors
- Designed for use with Flat Confort trays and 2-compartment Confort trays only.

Options:

- 4 - door version to maintain inertia of hot and cold partitions
- Lockable Door
- Door-ajar device
- Identification plate
- Protective tape
- Zinc-plated, stainless steel, or zinc-coated castors available, with optional central brake and directional locking configurations.



Front View

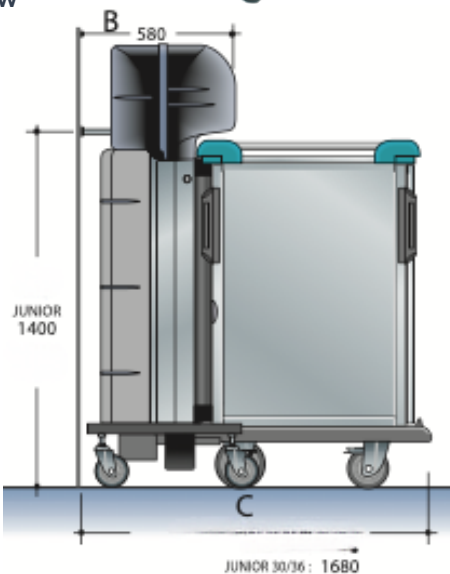

Side View

