



Technical Data:

External Dimensions	1200 x 925 x 900 mm
Top thickness	3 mm
Structure	2 mm in Stainless Steel
Ring Thickness	2 mm
Elliptical Bottom	3 mm
Tank Dimensions	Ø 500 x 490
Capacity	80 L
Connected Load	14 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 32 A
Space between Tank and Pillars	70 mm (easy cleaning)

Product Description:


- Tank and double layer in stainless steel 18.10 welded on the top
- Immersed heater into the double skin Electronic regulation of the water level into the double skin
- Hot/Cold water supply.
- Volumetric watermeter.
- Deplaced axis for draining at 300mm from the ground
- Heating stop while tilting.
- Differred start + timer
- Food trap
- 9 speed rotations programmed
- Tilting by electric cylinders (IP66 without maintenance)
- Removable mixing arm with bottom and sides PTFE scrapers
- Tilting control for a real ease of use, hygiene and safety
- Tilting stop in any position of tank

Options:

- 450 stainless steel feet height 900/930
- Side edge straight open for assembly machine on the right side
- Side edge straight open for assembly machine on the left side



Side View

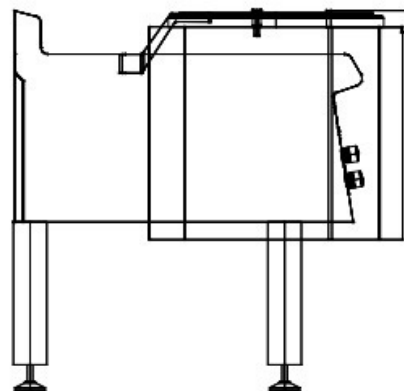

Top View

