



PHOENIKS

FlexiCombi Classic 6.1 Gas

Product Reference: FKG061R_CL

Technical Data:

Dimensions	1020 x 790 x 799 mm
Connected Load (Gas)	39.6 MJ/h
Voltage	240 1 Phase AC
Recommended Fuses	1 x 10 A
Frequency	50 Hz
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	6 (max. 65 mm deep)
Connected Load (Electrical)	0.6 kW
Gross Weight	160 kg
Heat Emission Latent	1982 W
Heat Emission Sensitive	1650 W

Product Description:

- ClimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps & USB interface available.
- 316 S 11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- EasyIn roll-in system for transport trolley racks to compensate for any unevenness of the floor up to 10 mm.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system
- 3 years warranty parts and labour.


Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.


Accessories:




Front View

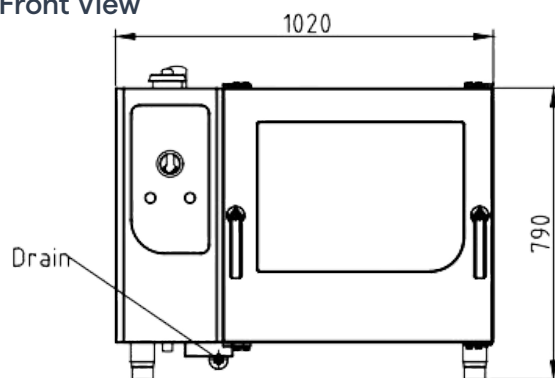

Side View

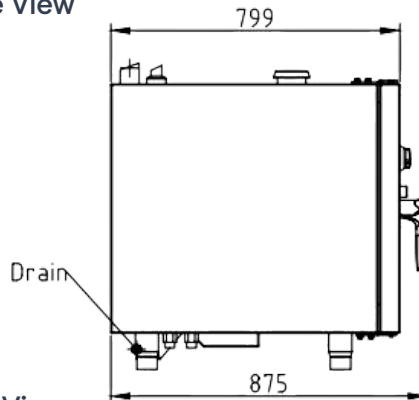

Top View

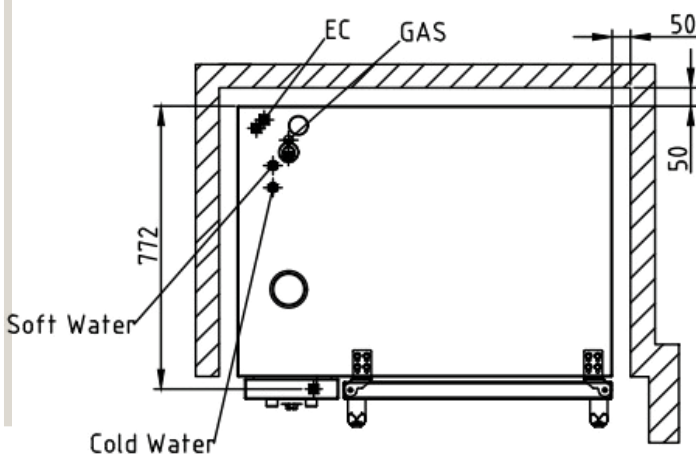

phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au