



PHOENIKS

FlexiCombi MagicPilot 6.1 Gas

Product Reference: FKG061R_MP



Technical Data:

Dimensions	1020 x 790 x 799 mm
Connected Load	39.6 MJ/h
Voltage	240 1 Phase AC 50 Hz
Recommended Fuses	1 x 10 A
Connected Load (Electric)	0.6 kW
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	6 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm)	6 (max. 65 mm deep)
Gross Weight	160 kg
Heat Emission Latent	1980 W
Heat Emission Sensitive	1650 W

Product Description:


- MagicPilot – Robust, wear-free, capacitive true colour touch screen.
- FlexiRack® – 50% more cooking capacity.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View

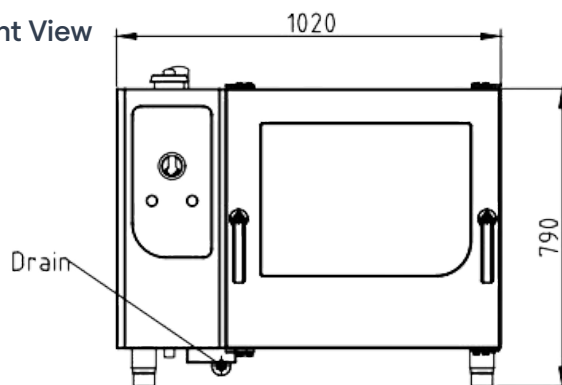

Side View

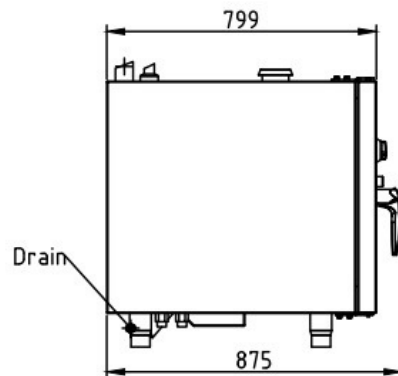

Top View

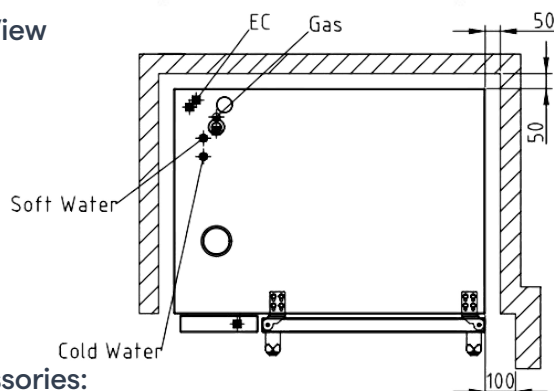

Accessories:



phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au