



PHOENIKS

FlexiCombi MagicPilot Maxi 6.2 Gas

Product Reference: FKG062R_MP

Technical Data:

Dimensions	1020 x 790 x 799 mm
Connected Load	61.2 MJ/h
Voltage	240 1 Phase AC 50 Hz
Recommended Fuses	1 x 10 A
Connected Load (Electric)	0.6 kW
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	12 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm)	6 (max. 65 mm deep)
FlexiRack® (530 x 570 mm)	6
Gross Weight	160 kg
Heat Emission Latent	3060 W
Heat Emission Sensitive	2550 W

Product Description:


- FlexiRack® – 50% more cooking capacity (= save time and energy).
- KlimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity.
- Up to 100 individual cooking programmes can be stored in up to 6 steps & USB interface.
- 316 S11 durable hygienic cooking chamber.
- EasyLoad crosswise insertion.
- Handshower.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View

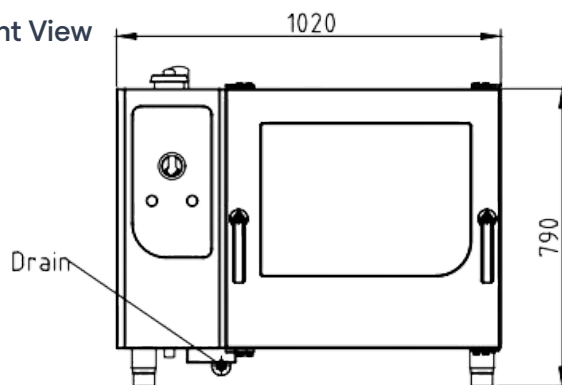

Side View

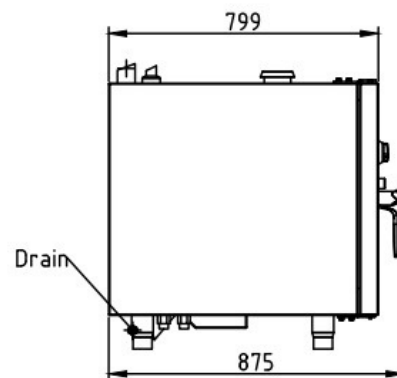

Top View

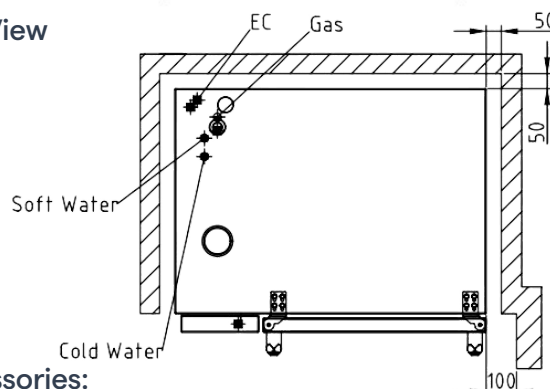

Accessories:



phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au