



PHOENIKS

# FlexiCombi MagicPilot 20.1 Gas

Product Reference: FKG201R\_MP

| Technical Data:                |                           |
|--------------------------------|---------------------------|
| Dimensions                     | 1115 x 1960 x 999 mm      |
| Connected Load                 | 187 MJ/h                  |
| Voltage                        | 240 1 Phase AC            |
| Recommended Fuses              | 1 x 10 A                  |
| Frequency                      | 50 Hz                     |
| Soft Water Connection          | DN 20 (R ¾" inside)       |
| Water Connection               | DN 20 (R ¾" inside)       |
| Water Pressure                 | 200 - 600 kPa (2 - 6 bar) |
| Drain Connection               | DN 50                     |
| Gastronorm 1/1 (530 x 325 mm)  | 40 (max. 65 mm deep)      |
| Gastronorm 2/1 (530 x 650 mm)  | 20 (max. 65 mm deep)      |
| Plates Ø 28 cm                 | 120                       |
| Plates Ø 28 cm - Plate trolley | 80                        |
| Gross Weight                   | 375 kg                    |
| Heat Emission Latent           | 10608 W                   |
| Heat Emission Sensitive        | 7072 W                    |

## Product Description:

- MagicPilot – capacitive true colour touch screen.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- EasyIn roll-in system for transport trolley racks to compensate for any floor unevenness up to 10 mm.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy; Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.


## Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.



Front View

Side View

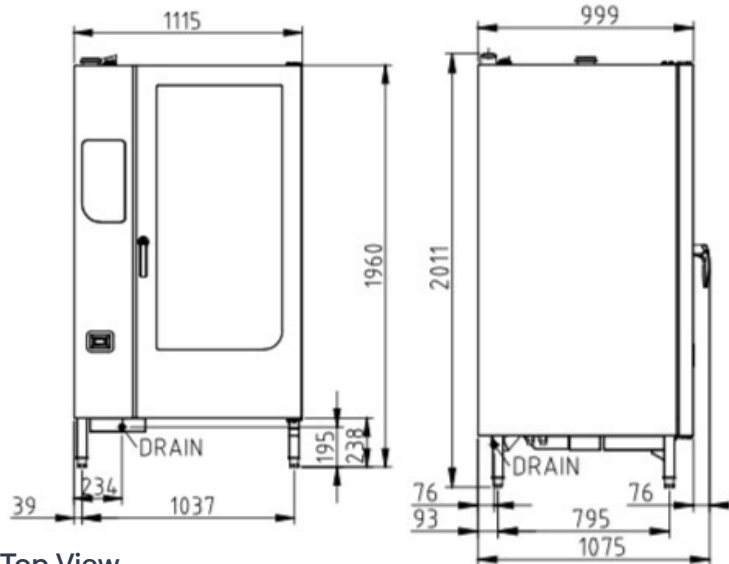

Top View

## Accessories:



phoeniks.com.au  
P- 1300 405 404  
E- contact@phoeniks.com.au