



PHOENIKS

FlexiCombi MagicPilot Maxi 20.2 Gas

Product Reference: FKG202R_MP

Technical Data:

Dimensions	1115 x 1960 x 999 mm
Connected Load	187 MJ/h
Voltage	240 1 Phase AC
Recommended Fuses	1 x 10 A
Frequency	50 Hz
Soft Water Connection	DN 20 (R ¾" inside)
Water Connection	DN 20 (R ¾" inside)
Water Pressure	200 - 600 kPa (2 - 6 bar)
Drain Connection	DN 50
Gastronorm 1/1 (530 x 325 mm)	40 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm)	20 (max. 65 mm deep)
Plates Ø 28 cm	120
Plates Ø 28 cm - Plate trolley	80
Gross Weight	375 kg
Heat Emission Latent	10608 W
Heat Emission Sensitive	7072 W

Product Description:

- MagicPilot – capacitive true colour touch screen.
- Video assist – Interactive user assistance with clips featuring professional chefs & USB interface.
- CombiDoctor – Self-diagnosis programme.
- GreenInside – Indicates the energy and water consumption for each cooking programme.
- AutoChef – Up to 350 individual cooking programmes and manual operating system.
- EasyIn roll-in system for transport trolley racks to compensate for any floor unevenness up to 10 mm.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 – It speeds up the cooking process and saves energy; Integrated heat exchanger.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.


Installation requirements:

- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.



Front View

Side View

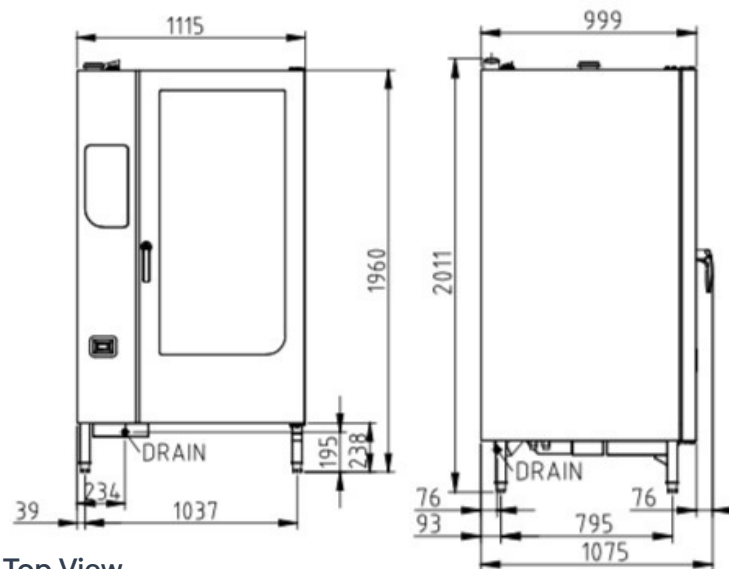

Top View

Accessories:



phoeniks.com.au
P- 1300 405 404
E- contact@phoeniks.com.au