



# PHOENIKS

## FlexiCombi Classic 10.1 Gas Product Reference: FKG101R\_CL

### Technical Data:

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| Dimensions                                                             | 1020 x 1060 x 799 mm      |
| Connected Load                                                         | 64.8 MJ/h                 |
| Voltage                                                                | 240 1 Phase AC 50 Hz      |
| Recommended Fuses                                                      | 1 x 10 A                  |
| Connected Electric load                                                | 0.6 kW                    |
| Soft Water Connection                                                  | DN 20 (R ¾" inside)       |
| Water Connection                                                       | DN 20 (R ¾" inside)       |
| Water Pressure                                                         | 200 - 600 kPa (2 - 6 bar) |
| Drain Connection                                                       | DN 50                     |
| Gastronorm 1/1 (530 x 325 mm) & FlexiRack® (530 x 570 mm)              | 10 (max. 65 mm deep)      |
| Plates Ø 28 cm on FlexiRack® grids & Plates Ø 40 32 cm – plate trolley |                           |
| Gross Weight                                                           | 180 kg                    |
| Heat Emission Latent                                                   | 3240 W                    |
| Heat Emission Sensitive                                                | 2700 W                    |

### Product Description:


- FlexiRack® – 50% more cooking capacity.
- KlimaSelect – Humidity and temperature control measurement (= reliable food quality).
- 5 programmable fan speeds for best cooking uniformity & USB Interface.
- Up to 100 individual cooking programmes can be stored in up to 6 steps.
- 316 S 11 durable hygienic cooking chamber.
- EasyIn roll-in system for transport trolley racks to compensate for any unevenness of the floor up to 10 mm & EasyLoad crosswise insertion.
- DynaSteam2 – It speeds up the cooking process and saves energy.
- WaveClean – Automatic cleaning system.
- 3 years warranty parts and labour.

### Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.




Front View

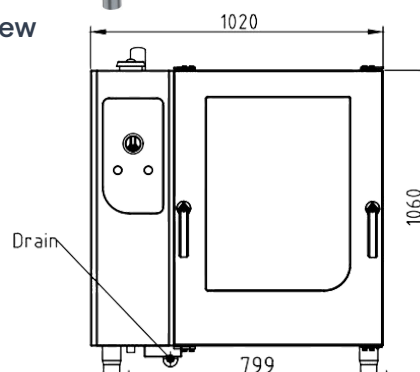


Side View

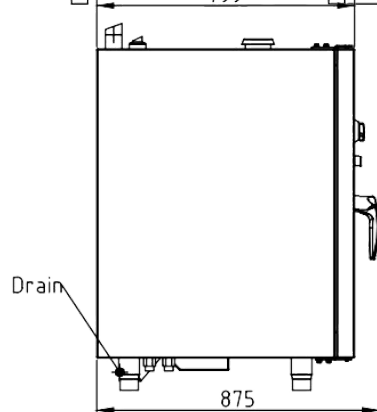

Top View

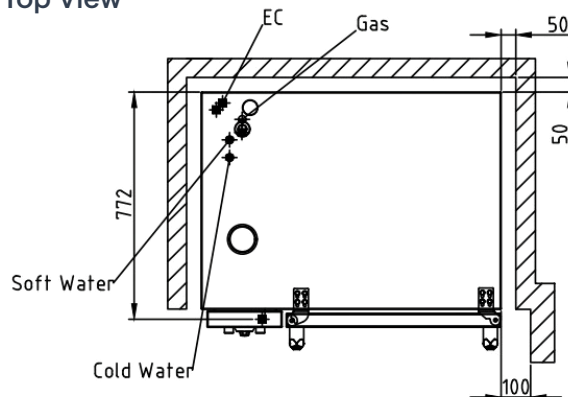

### Accessories:



phoeniks.com.au  
P- 1300 405 404  
E- contact@phoeniks.com.au