



**GEOLINE
RANGE**
countertop



GLN | Countertop induction 1 zone

- 2500W or 3000W or 3500W
- Vitroceramic dimensions 280 x 280 x 4mm
- Capacitive touches control panel
- Power setting (W) from 50W by 100W steps - temperature setting from 0° to 250°C by 5°C steps
- Timer & Boost
- Power supply 220-240V single-phase 50-60Hz

GLN 2500 PASTRY
ADV1870

GLN 3000
ADV1869

GLN 3500
ADV1702



Adventys exclusivity

GLN K | Countertop induction 1 zone - knob control

- 3000W or 3500W
- Vitroceramic dimensions 280 x 280 x 4mm
- Capacitive touches control panel + knob
- Power setting (W) from 50W by 100W steps - temperature setting from 30° to 250°C by 5°C
- Power supply 220-240V singlephase 50-60Hz

GLN 3000 K **GLN 3500 K**
ADV2021 ADV2030



GLN2 S | Countertop induction 2 zones - side by side

- 3500W (2x1750W)
- Vitroceramic dimensions 560 x 280 mm protected on 4 sides
- Capacitive touches control panel
- Power setting (W) from 50W by 100W steps or temperature setting from 30° to 250°C by 5°C steps
- Timer + 2 digits display
- MAX key for instantaneous maximum power
- Power supply 220-240V single-phase 50-60Hz

GLN2 3500 S
ADV1797



GLN2 F | Countertop induction 2 zones - front to back

- 3500W (2x1750W)
- Vitroceramic dimensions 280 x 560 mm protected on 4 sides
- Capacitive touches control panel
- Power setting (W) from 50W by 100W steps or temperature setting from 30° to 250°C by 5°C steps
- Power supply 220-240V single-phase 50-60Hz

GLN2 3500 F
ADV1779

COUNTERTOP Geoline



GL2 F | Countertop induction 2 zones

- 2x2500W - 2x3000W - 2x3500W
- Vitroceraic dimensions 650 x 370 mm
- Capacitive touches control panel. On/Off manual power setting (+/-) and 2 digits display by zone
- Timer
- Power supply 230V single-phase / 400V three-phase 50-60HZ
- Power cable without plug for single-phase or three-phase connection

GL2 5000 F **GL2 6000 F** **GL2 7000 F**
ADV1620 ADV1594 ADV1755



GL2 S | Countertop induction 2 zones

- 2x2500W - 2x3000W - 2x3500W
- Vitroceraic dimensions 650 x 323 mm
- Capacitive touches control panel - 20 power levels
- Timer
- Power supply 230V single-phase / 400V three-phase 50-60HZ
- Power cable without plug for single-phase or three-phase connection

GL2 5000 S **GL2 6000 S** **GL2 7000 S**
ADV1619 ADV1551 ADV1754



GLP | Countertop induction plancha 2 zones

- 6000W singlephase or 8000W threephase
- Cooking surface 688 x 384 mm
- 2 capacitive touches control panel - 3 keys + 4 digits display
- Temperature setting from 30 to 250°C
- Power supply 230V single-phase / 400V three-phase 50-60HZ
- Power cable without plug for singlephase or threephase connection

GLP 6000 **GLP 8000**
ADV557 ADV1556



GLW | Countertop induction wok

- 3500W
- Vitroceraic and wok bowl format coil
- Capacitive touches control panel - power setting
- Timer
- Power supply 220-240V single-phase 50-60HZ
- Power cable with plug
- **Wok pan included**

GLW 3500
ADV1610



GEOLINE
RANGE
drop-in




Product cut-out dimensions: 352 x 352 mm
Control panel cut-out dimensions: 198 x 68 mm

GL 3000 DIR | 1 zone induction with remote control

- Power 3000W or 3500W
- Vitroceramic dimensions 340x340mm **with frame**
- Remote capacitive touches control panel - 6 keys
- Power setting and temperature setting from 30° to 250°C by 5°C steps
- Timer
- MAX function
- Power supply 220-240V single-phase 50-60Hz

GL 3000 DIR
ADV1628

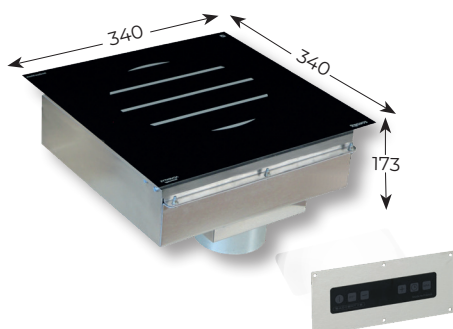


Product cut-out dimensions: 346 x 346 mm
Control panel cut-out dimensions: 198 x 68 mm

GL 3000 FLR | 1 zone induction with remote control

- Puissance 3000W ou 3500W
- Dimensions vitro 340x340mm **without frame**
- Remote capacitive touches control panel - 6 keys
- Power setting and temperature setting from 30° to 250°C by 5°C steps
- Timer
- MAX function
- Power supply 220-240V single-phase 50-60Hz

GL 3000 FLR
ADV1548

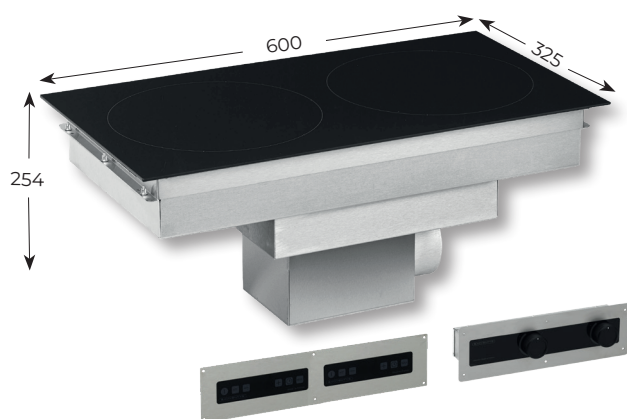


Product cut-out dimensions: 331 x 606 mm
Control panel cut-out dimensions: 392 x 80 mm

GL2 FLR | 2 zones induction - flushed

- Power 6000W or 7000W
- Vitroceramic dimensions 600 x 325 mm **without frame**
- Products 600x325x254 mm
- To be installed front to back or side by side**
- Remote capacitive touches control panel (20 power levels) or knob + display
- Power supply 220-240V single-phase 50-60Hz

	6000W	7000W
Knob	ADV2164	ADV2057
Capacitive	ADV1558	ADV1845

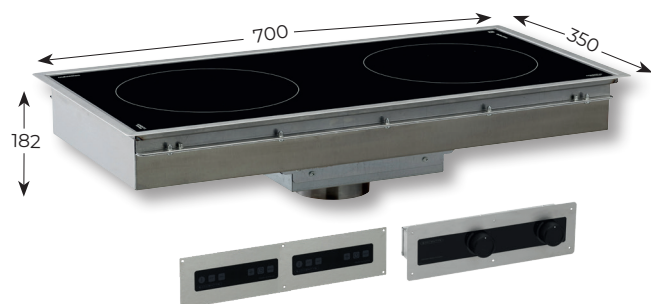

Product cut-out dimensions: 333 x 692 mm
Control panel cut-out dimensions: 392 x 80 mm

GL2 DIR | 2 zones induction - drop-in

- Power 6000W - 7000W
- Vitroceramic dimensions 664x315mm **with frame**
- Product 700x350x182mm
- To be installed front to back or side by side**
- Remote capacitive touches control panel (20 power levels) or knob + display
- Power supply 220-240V single-phase 50-60Hz

	6000W	7000W
Knob	ADV2166	ADV2167
Capacitive	ADV1879	ADV1756