



Technical Data:

Dimensions	500 x 700 (900) x 700 mm
Nominal Capacity	30 L
Dimension of Effective Area	400 x 235 x 400 mm
Connected Load	10 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 16 A
Net Weight	44 kg
Gross Weight	51 kg
Heat Emission Latent	7000 W
Heat Emission Sensitive	900 W
Type of Protection	IPX4

Product Description:

- Surface load of heating elements 3.95 W/cm².
- Housing made completely of CNS.
- U-shaped connection channel, flush with top plate; tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via a drip outlet in the top plate at the front.
- CNS tubular heating elements are gentle to the oil – prolonging use and extending element service life.
- Deeper, cool zone under the heating elements collect all loose particles e.g. breadcrumbs.
- Equipped for connection to a power optimisation system with potential free contact as standard.

Installation requirements:


- Electric Supply provided by Customer.

Optional Accessories:


- 1 Filter basket including 40 filter bags made of special fleece paper(216017) (Reference Number: 206023)
- 1 Oil receptacle 30 L (Reference Number: 813006)
- Appliance Foot, 150 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204352)
- Appliance Foot, 200 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204252)



Front View

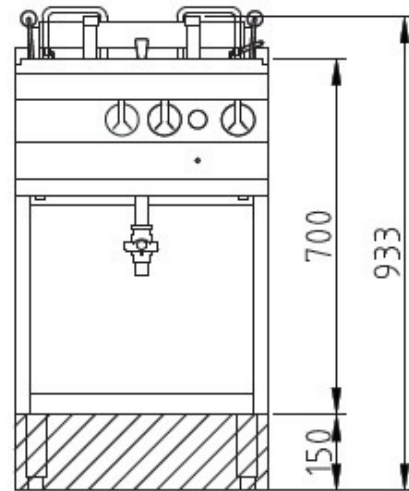

Top View

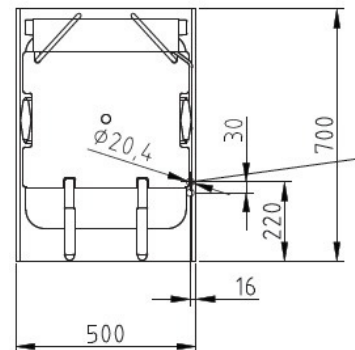

Included Accessories:

- 2 Lid, 2 oil clarifying tray, 2 basket "L"

Optional Accessories:

