



Electric Griddle Plate 2 Supra Heat Resistant, Half ribbed

Product Reference: 1321131

PHOENIKS

Technical Data:

Dimensions	800 x 700 x 700 mm
Dimension of Effective Area	700 x XXX x 540 mm
Connected Load	10.8 kW
Voltage	415 3 Phase AC 50 Hz
Recommended Fuses	3 x 20 A
Standard Gas Pressure (Natural Gas)	20 mbar
Standard Gas Pressure (Liquid Gas)	30 (DE), 50 (EU)
Net Weight	102 kg
Gross Weight	113 kg
Heat Emission Latent	4320 W
Heat Emission Sensitive	3564 W

Product Description:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- U-shaped connection channel, flush with top, tightly fitted to the substructure, for maximum hygiene.
- Directed drainage of fluids via outlet in the top plate at the front.
- SUPRA heating system for greater heating capacity and even heat distribution, shorter heating up times and a longer service life of heating elements.
- Appliance with two separate heating zones.
- Supplied ready for connection to a power optimising system.

Installation requirements:


- Electric Supply provided by Customer.

Optional Accessories:


- 1 Splash Guard (Reference Number: 10017094)
- 1 Griddle plate scraper for smooth and ribbed griddle plates (Reference Number: 10018076)
- 1 Fat drain plug (Reference Number: 204534)
- Appliance Foot, 150 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204352)
- Appliance Foot, 200 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204252)



Front View

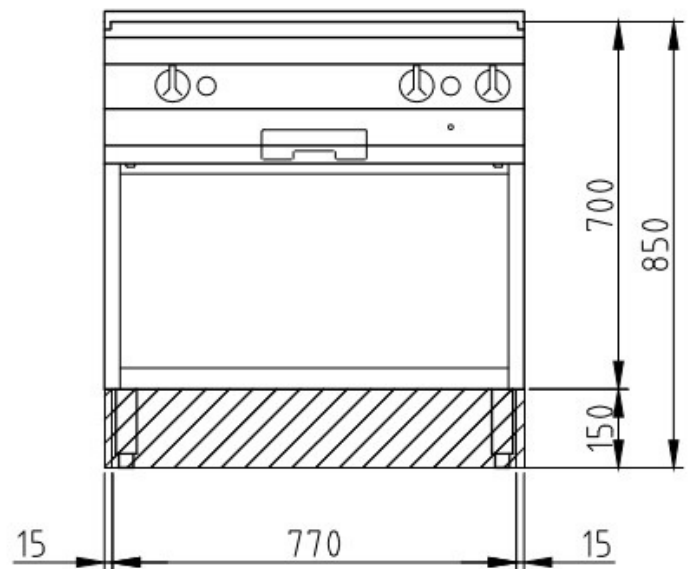

Top View

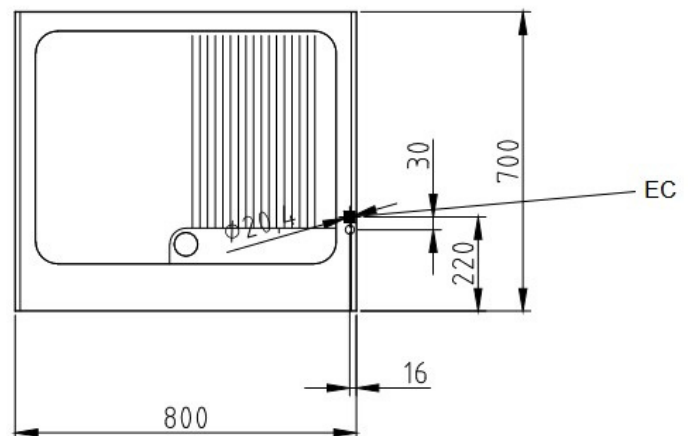

phoeniks.com.au

P- 1300 405 404

E- contact@phoeniks.com.au