



Technical Data:

Dimensions	600 x 700 (900) x 850 mm
Nominal Capacity	26 L
Dimension of Effective Area	500 x 100 x 540 mm
Connected Load	7.2 kW
Voltage	415 3 Phase AC
Recommended Fuses	3 x 16 A
Net Weight	82 kg
Gross Weight	91 kg
Heat Emission Latent	2880 W
Heat Emission Sensitive	3240 W
Type of Protection	IPX5

Product Description:

- Housing made completely of chrome nickel steel (1.4301) / (304).
- U-shaped connection channel, flush with top.
- Directed drainage of fluids via outlet in the top plate at the front.
- SUPRA heating system for greater heating capacity and even heat distribution, shorter heating up times and a longer service life of heating elements.
- Frying pan made completely of CNS.
- Smooth frying surface made of PowerBlock special sandwich material.
- This unit has multifunctional usage and can cope with frying, boiling, steaming or stewing.

Installation requirements:

- Electric Supply provided by Customer.

Included Accessories:


- 1 Plug

Optional Accessories:

- Appliance Foot, 150 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204352)
- Appliance Foot, 200 mm high, pluggable +/- 15 mm height adjustable (4 feet) (Reference Number: 204252)



Front View

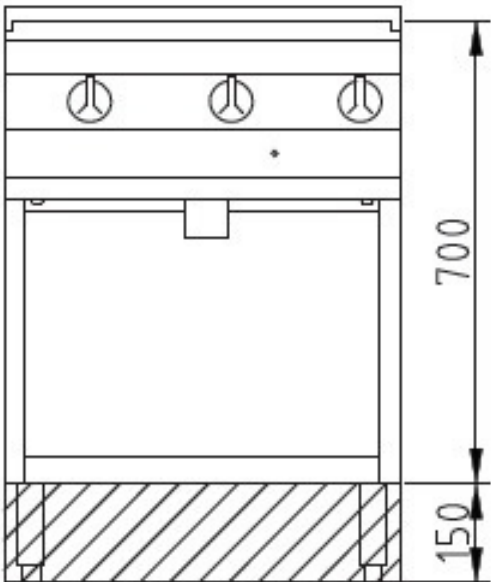

Top View

