



Technical Data:


|                       |                                   |
|-----------------------|-----------------------------------|
| Loading               | 15 GN 1/1 containers h. 65 mm     |
| Space between Sliders | 71 mm                             |
| External Dimensions   | 528 x 824 x 1489 mm               |
| Internal Dimensions   | 330 x 590 x 1105 mm               |
| External Volume       | 0.645 m <sup>3</sup>              |
| Internal Volume       | 0.215 m <sup>3</sup>              |
| Weight when empty     | 78 kg                             |
| Connected Load        | 1.2 kW - 240 1 Phase AC           |
| Recommended Fuse      | 1 x 10 A                          |
| Current               | 5.6 A                             |
| Pwer Consumption      | 0.3 kWh                           |
| Protection Index      | 25                                |
| Standards             | NF EN 60335-1<br>NF EN 60335-2-49 |

Product Description:

- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiuses, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels - 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.



Front View

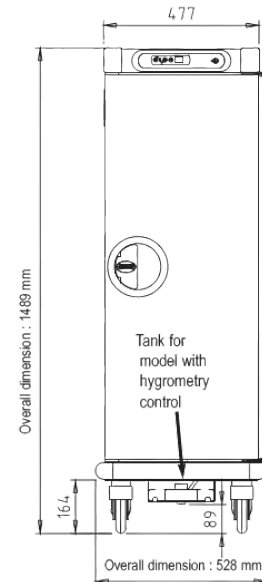

Side View

