

Technical Data:

Loading	20 GN 2/1 containers h. 65 mm OR 40 1/1 containers h. 65 mm
Space between Sliders	71 mm
External Dimensions	733 x 941 x 1915 mm
Internal Dimensions	535 x 710 x 1450 mm
External Volume	1.296 m3
Internal Volume	0.555 m3
Weight when empty	135 kg
Connected Load	2 kW - 240 1 Phase AC
Recommended Fuse	1 x 10 A
Current	9.1 A
Pwer Consumption	0.78 kWh
Protection Index	25
Standards	NF EN 60335-1 NF EN 60335-2-49

Product Description:


- Made of food quality stainless steel.
- Rock wool insulation, 70 mm thick for walls and 45 mm thick for the door.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels - 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumpers.
- Electronic control thermostat with digital display (range from 60 to 85°C).
- Even heating by means of shielded heating element and centrifugal fan.
- Spiral power cable 3G1.5 with moulded plug + plug support.

Hygrometry Control:

- Hygrometry controlled by 5 pre-set cycles in the elec. control thermostat.
- Removable rotomoulded tank, capacity 2 litres, accessible from the front.



Front View

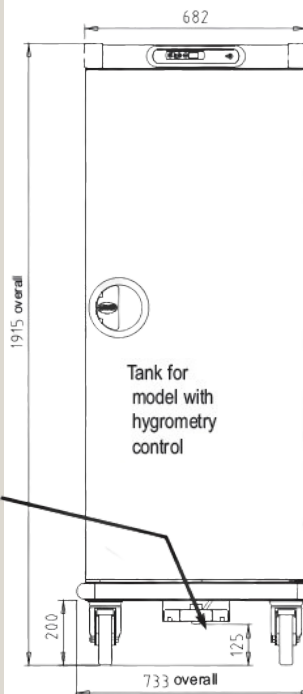

Side View

