



Technical Data:


Loading	10 GN 1/1 containers h. 65 mm
Space between Sliders	71 mm
External Dimensions	552 x 815 x 1425 mm
Internal Dimensions	330 x 590 x 750 mm
Weight when empty	90 kg
Max Loading	120 kg
Voltage	240 1 Phase AC
Power Input	220 W
Power refrigerating	225
Max current	1.8 A
Protection Index	25
Standards	NF EN 60335-1 NF EN 60335-2-49

Product Description:


- Made of food quality stainless steel.
- Insulation of walls 45 mm rock wool + 20 mm melamine foam.
- Insulation of door 45 mm thick with rock wool. Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels Ø 125 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Fan-assisted refrigeration controlled by an electronic thermostat with digital readout and the following functions:
 1. Adjustment range of set value from 0 to 10 °C.
 2. Possibility of deferred start.
 3. Dysfunction alarms for cabinet and
 4. refrigerated unit maintenance.
- Spiral power cable 3G1.5 with moulded plug + plug support.

Options:

- Extra-cost for lock and key (Reference Number: 707961)

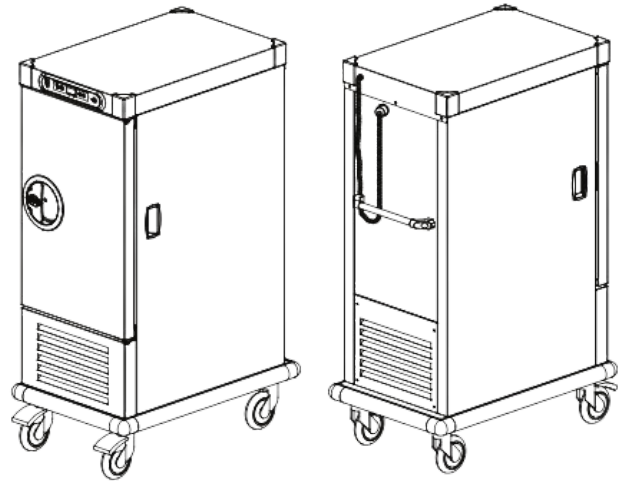

Front View

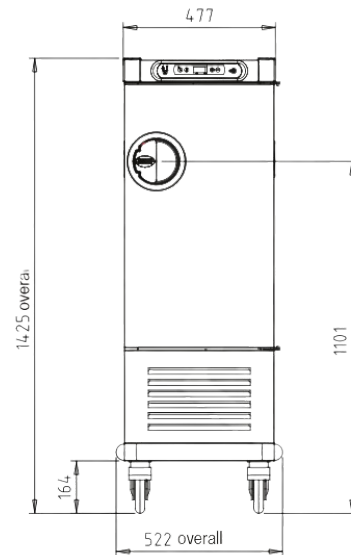

Side View

