



Technical Data:	
Loading	15 GN 2/1 h. 65 mm OR 30 GN 1/1 h. 65 mm
Space between Sliders	71 mm
External Dimensions	535 x 710 x 1105 mm
Internal Dimensions	733 x 941 x 1785 mm
External Volume	1.048 m ³
Internal Volume	0.42 m ³
Weight when empty	144 kg
Connected Load	0.82 kW - 240 1 Phase AC - 50 Hz
Power input	325 W
Max Current	2.3 A
Power Consumption	0.32 kWh
Protection Index	25
Standards	NF EN 60335-1 NF EN 60335-2-49
Power Refrigerating	380 W
Max. Loading	240 kg

Product Description:


- Made of food quality stainless steel.
- Insulation of walls 45 mm rock wool + 20 mm melamine foam.
- Insulation of door 45 mm thick with rock wool. Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- 4 swivel stainless steel wheels 125 mm including 2 brakes to replace wheels with polyamid cover
- Circumferential bumper.
- Fan-assisted refrigeration controlled by an electronic thermostat with digital readout and the following functions:
 1. Adjustment range of set value from 0 to 10 °C.
 2. Possibility of deferred start.
 3. Dysfunction alarms for cabinet and
 4. refrigerated unit maintenance.
- Spiral power cable 3G1.5 with moulded plug + plug support.

Options:

- Extra-cost for lock and key (Reference Number: 707961)



Front View

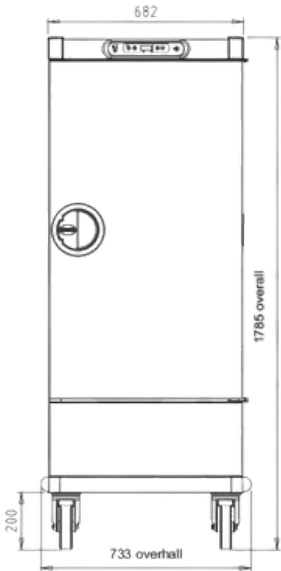

Side View

