



Proud
of my
equipment

TROLLEYS



SERVING TROLLEYS

- **Safe transport:**
press-drawn trays 10 mm deep for optimum holding of containers.
- **Comfort:**
sound-proofed trays.
- **Sturdiness:**
welded assembly over the whole tray height with flattened edges in lower part.



PLATE TROLLEY

Raised platform

- **Sturdiness:**
bent square (25 × 25) tube and bent sheet metal with flattened edges. Stainless steel structure.
- **Ergonomical:**
platform height: 460 mm (200 plates) and 485 mm (400 plates).



Quick heating
Optimum
temperature
distribution

HEATED TROLLEYS

- **Easy use:**
no tools required to adjust plate diameter (up to 320 mm).
- **Quality of steering:**
silent, easy sliding, reliability
- **Easy cleaning:**
removable heated sections for deep cleaning.
Flexible plug and lead with parking socket

GN RACKING TROLLEYS

- **Strength:**
load 250 kg per trolley.
- **Sturdiness:**
continuous welded sliders over the whole height.
- **Optimum accessibility**
longitudinal reinforcement bar not necessary at the front.
- **Swivel wheels**
Ø 125 mm with non-marking tyre, soundless.



Wheels with
polyamide shape
Less inertia on start-up
Silent.



Flash on our
documentation !

TOURNUS
EQUIPEMENT

ORIGINE
FRANCE
GARANTIE

AENOR Cert. 6029
Except for plate trolleys



SERVING TROLLEYS



Stainless steel welded construction. Stainless steel trays with rounded edges, sound-proofed trays. Arched handles: tube Ø 25 mm. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes, with annular bumpers. Non-marking rubber tyres. Max load: 50 kg by level. Hygiene certified.



801 542

Serving trolleys with 2 arched handles

Serving trolleys with 2 arched handles	Overall Dim. l x W x h (mm)	Space between trays	Ref.
2 trays 800 x 530 mm	895 x 625 x 960	560	801 542
3 trays 800 x 530 mm	895 x 625 x 960	260	801 543
4 trays 800 x 530 mm	895 x 625 x 1260	260	801 544
2 trays 1000 x 600 mm	1095 x 695 x 960	560	801 552
3 trays 1000 x 600 mm	1095 x 695 x 960	260	801 553
4 trays 1000 x 600 mm	1095 x 695 x 1260	260	801 554

THE
TOURNUS
ASSET

- Press-drawn trays with peripheral surround of 10 mm.
- Shelf width of 530 mm for efficient holding of a GN container and optimum safety of use.

Serving trolleys with 1 arched handle

Serving trolleys with 1 arched handle	Overall Dim. l x W x h (mm)	Space between trays	Ref.
2 trays 800 x 530 mm	895 x 625 x 960	560	801 602
3 trays 800 x 530 mm	895 x 625 x 960	260	801 603
2 trays 1000 x 600 mm	1095 x 695 x 960	560	801 612
3 trays 1000 x 600 mm	1095 x 695 x 960	260	801 613



801 543



801 603





Consult'Express



Your shipping date



801 547



801 583

Fitting with screw

801 395



801 537



801 538



Serving trolleys with 2 arched handles and gallery rails

Gallery rails height 50 mm in stainless steel wire Ø 8 mm, around all 4 sides for each level.

Serving trolleys with 2 arched handles	Overall Dim. l × W × h (mm)	Space between trays	Ref.
2 trays 800 × 530 mm with gallery rails	895 × 625 × 960	560	<u>801 546</u>
3 trays 800 × 530 mm with gallery rails	895 × 625 × 960	260	<u>801 547</u>
2 trays 1000 × 600 mm with gallery rails	1095 × 695 × 960	560	<u>801 556</u>
3 trays 1000 × 600 mm with gallery rails	1095 × 695 × 960	260	<u>801 557</u>

Serving trolley delivered as flat pack item

Clearing trolleys with 2 arched handles, delivered as flat pack item. Tray assembly by screw on tubes to a pre-adjusted height.

Serving trolley (flat pack)	Overall Dim. l × W × h (mm)	Space between trays	Reference
2 trays 800 × 530 mm	895 × 625 × 960	560	<u>801 572</u>
3 trays 800 × 530 mm	895 × 625 × 960	260	<u>801 573</u>
2 trays 1000 × 600 mm	1095 × 695 × 960	560	<u>801 582</u>
3 trays 1000 × 600 mm	1095 × 695 × 960	260	<u>801 583</u>

Accessories

Description	Overall Dim. l × W × h (mm)	Reference
Hook-on cutlery pan 1/3 GN	325 × 176 × 200	<u>801 395</u>
Hook-on waste pan	420 × 200 × 250	<u>801 537</u>
Hook-on dustbin bag support 70 litres	360 × 355 × 810	<u>801 538</u>
Trolley covers 895 × 625 mm		<u>229 603</u>
Trolley covers 1095 × 695 mm		<u>229 604</u>

Option

Extra cost for serving trolleys with stainless steel wheels (**83** instead of 80)



229 603



CONSTANT LEVEL PLATE DISPENSERS



808 171

808 172



808182

THE
TOURNUS
ASSET

- **Plate holding trays** guided by easy sliding, noiseless rollers.
- **Handling level** easily adjusted by adding or removing springs without using tools.
- **Protection:** bumpers made of non-marking composite material in the 4 corners.



808 205

Stainless steel construction. Rounded inside angles for easy cleaning. Stainless steel steering handle, stainless steel tube Ø 25 mm.

4 moulded polyethylene protective bumpers. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Removable constant level dispensers, stack height 580 mm, approximately 60 plates Ø 180 to 290 mm.

Mobile heated plate dispensers

Powered by on/off switch with lamp. Static heating controlled by mechanical thermostat adjustable from 0°C to 90°C.

Heated by 2 stainless steel shielded elements located on the sides. Rock wool insulation. Power rating 800 W (1 stack) and 925 W (2 stacks), voltage 230 V. Trolleys delivered with transparent polycarbonate lids.

Heated plate trolleys	Overall Dim. l × W × h (mm)	Reference
Heated single plate stack type with lid	530 × 485 × 900	808 171
Heated twin plate stack type with lids	960 × 485 × 900	808 172
Heated twin plate stack type with lids (for plate diam. 215-320 mm)	990 × 520 × 900	808 177

Mobile ambient plate dispensers

Option: lids.

Description	Overall Dim. l × W × h (mm)	Reference
Ambient single plate stack type without lid.	530 × 485 × 900	808 181
Ambient twin plate stack type without lids.	960 × 485 × 900	808 182

Mobile universal plate dispensers

Trolleys with rectangular platform for all types of dishes (bowls, saucers, oval or rectangular plates). Heated unit c/w stainless steel lid. Ambient unit is not supplied with lid but is optional.

Description	Overall Dim. l × W × h (mm)	Reference
Ambient universal trolley (open top)	960 × 485 × 900	808 201
Heated universal trolley (with lid)	960 × 485 × 900	808 205

Accessories


Description	Overall Dim. l × W × h (mm)	Reference
Transparent polycarbonate lid	Ø 375	230 079
Stainless steel lid for ambient universal trolley	750 × 415	119 268



230 079



119 268



Consult'Express



Your shipping date

GLASSES OR TRAY DISPENSER TROLLEYS

Stainless steel construction. Platform thickness 1,2 mm. Mobile part guided by 4 guide rolls. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Moulded polyethylene protective buffers.



808 102



808 103



808 106

Extra cost: 808 107
(pans GN1/3
not supplied)



Description	Overall Dim. l × W × h (mm)	Reference
Self-levelling glass dispenser trolley capacity: 6 baskets 510 × 510 mm, height 115 mm or 10 baskets, height 75 mm	817 × 545 × 930	<u>808 102</u>
Self-levelling glass dispenser trolley with draining pan (GN1/2 polyethylene, depth. 100 mm) under platform 510 × 510 mm with diamond point base, capacity: 6 baskets, height 115 mm or 10 baskets, height 75 mm.	817 × 545 × 930	<u>808 100</u>
Self-levelling glass dispenser trolley stainless steel surround cover capacity: 6 baskets 530 × 530 mm, height 115 mm or 10 baskets, height 75 mm	835 × 645 × 1040	<u>808 103</u>
Self-levelling tray dispenser trolley platform 540 × 380 mm, capacity: 140 trays	817 × 545 × 930	<u>808 105</u>
Self-levelling tray dispenser trolley stainless steel surround and cover capacity: 140 trays 560 × 400 mm	705 × 675 × 1040	<u>808 108</u>
Self-levelling tray dispenser trolley with lateral guide, capacity: 140 trays 540 × 380 mm	817 × 545 × 930	<u>808 106</u>
Self-levelling trolley for ABS plastic tray capacity: 140 trays 610 × 410 mm	860 × 545 × 930	<u>808 109</u>

Options for trolleys

Description	Reference
Cutlery dispenser fitted on tray dispenser trolleys	<u>808 107</u>
Polyamide cover 870 × 540 × 800 mm for glasses or tray dispenser trolleys	<u>221 233</u>
Polyamide cover 920 × 570 × 1070 mm for cutlery dispenser trolleys	<u>221 232</u>

Option

Extra-cost for 4 stainless steel wheels in lieu of polyamide type wheel (plates, glasses and trays) (**83** instead of 80)



808 231



808 235



808 236



808 237

Drop in dispensers with removable insert

Drop in dispenser capacities: ambient or heated plate dispenser: up to 60 plates, 180-290 mm diameter. Glasses dispenser, 6 baskets height 115 mm or 10 baskets height 75 mm. Tray dispenser: up to 140 trays. Heated dispenser provided with lid & remote control mounting switch.

Description	Overall Dim. l × W × h (mm)	Reference
Ambient single plate stack drop in dispenser without lid	Ø 380 × h. 740	<u>808 231</u>
Heated single plate stack drop in dispenser with lid	Ø 380 × h. 740	<u>808 235</u>
Drop in glasses dispenser	690 × 710 × 715	<u>808 236</u>
Drop in tray dispenser (for up to 460 × 360 mm tray)	580 × 660 × 715	<u>808 237</u>



SELF-SERVICE TROLLEYS

Stainless steel construction. Frame in 25 × 25 mm stainless steel tube. Longitudinal reinforcing bars in 50 × 25 mm stainless steel tube. Wire type tray runner panels in 4.8mm diameter s/steel, welded to frame. With or without beige laminate side modesty panels thickness 2 mm fixed by clips. 4 swivel wheels Ø 125 mm with polyamide cover including 2 braked. Annular bumpers.



6 tier (tray entry width ways)

Trolley with entry side by side. Capacity: 12 or 18 trays depending on the models. Space between tiers: 125 mm.

Description	Overall dim. L × w × h (mm)	Width of trays (mm)	Trolleys without panels	Trolleys with beige panels
			Ref.	Ref.
Trolley 2 × 6 tiers	930 × 630 × 1030	320 to 370	<u>800 071</u>	<u>800 072</u>
Trolley 2 × 6 tiers with upper shelf	930 × 630 × 1040	320 to 370	<u>800 073</u>	<u>800 074</u>
Trolley 3 × 6 tiers with upper shelf	1340 × 630 × 1040	320 to 370	<u>800 075</u>	<u>800 076</u>



12 tier (tray entry width ways)

Description	Overall Dim. l × W × h (mm)	Width of trays (mm)	trolleys without panels	trolleys with beige panels
			Ref.	Ref.
Trolley 1 × 12 tiers	510 × 630 × 1790	320 to 370	<u>800 081</u>	<u>800 082</u>
Trolley 2 × 12 tiers	930 × 630 × 1790	320 to 370	<u>800 091</u>	<u>800 092</u>




12 tier (tray entry length ways)

Capacity: 24 trays, entry back to back. Space between tiers: 125 mm.

Description	Overall dim. L × w × h (mm)	Length of trays (mm)	Trolleys without panels	Trolleys with panels
			Ref.	Ref.
Trolley 2 × 12 tiers	620 × 790 × 1790	400 to 480	<u>800 093</u>	<u>800 094</u>
Trolley 2 × 12 tiers	700 × 790 × 1790	480 to 560	<u>800 095</u>	<u>800 096</u>

Option

Extra cost for self-service trolleys with 4 stainless steel wheels (**83** instead of 80)



Consult'Express



Your shipping date

Choose the colors of your cladding

 The standard side modesty panels of the self-service trolleys are made of 2 mm thick compact beige laminate

You can personalise the cladding of the 2 outsides of your trolleys in one of the colours below (minimum order of 3 trolleys):

- Ref. 702 097, personalised cladding for trolley with 6 tiers. EXTRA CHARGE PER TROLLEY
- Ref. 702 098, personalised cladding for trolley with 12 tiers with insertion widthways. EXTRA CHARGE PER TROLLEY
- Ref. 702 099, personalised cladding for trolley with 12 tiers with insertion lengthways. EXTRA CHARGE PER TROLLEY

Personalisation is done by bonding a resistive film (cleaning resistant) to the top side of the laminated surfaces. We offer a choice of 15 colours covering cladding (swatch on request).

STANDARD COLOURS TO MATCH THE CLADDING OF TOURNUS DISPENSING UNITS

<i>New</i> U504-ST9 Cosmic blue	<i>New</i> U323-ST9 Cherry red	<i>New</i> U114-ST9 Sunflower yellow	<i>New</i> U630-ST9 Apple green	<i>New</i> U999-ST7 Black
W1100-ST9 Alpine White	<i>New</i> U830-ST9 Terracotta nude	<i>New</i> F500-ST20 Metallic stainless steel	<i>New</i> F187-ST9 Dark grey Chicago concrete	<i>New</i> F186-ST9 Light grey Chicago concrete
H3860-ST9 Champagne American maple	H1145-ST10 Natural Bardolino oak	<i>New</i> H1180-ST37 Halifax natural oak	H3171-ST12 Oiled Kendal oak	<i>New</i> H3146-ST19 Lorenzo sand oak

Trolleys can also be personalised with your logo or that of your customers: please make enquiries with us.

TROLLEY FOR DISHWASHER BASKETS



804 193

804 196

Trolley with 8 tiers for horizontal storage of dishwasher baskets. Stainless steel construction. Square tubular leg 25 × 25 mm. Continuous argon welded basket runners. 4 swivel wheels 125 mm, 2 brakes, with polyamide cover. Annular wheel guards. Space between tiers: 189 mm.

Trolley (for storage of dishwasher baskets on end): welded stainless steel construction. 25 × 25 mm tubular structure, 3 tiers with a spacing of 535 mm, including a handrail at rear. 4 swivel wheels Ø 125 mm with polyamide cover, 2 with brakes. Annular wheel guards. Capacity: 8 baskets 500 × 500 mm per level, i.e. a total of 24 baskets.

Description	Overall Dim. l × W × h (mm)	Reference
Trolley with 8 tiers (for horizontal storage of dishwasher baskets)	630 × 630 × 1785	<u>804 193</u>
Trolley (for storage of dishwasher baskets on end)	1000 × 500 × 1785	<u>804 196</u>
Polyamide cover with zip for trolley 8 tiers	585 × 600 × 1620	221 231






THE TOURNUS ASSET

- Openwork, sloped base to facilitate draining of cleaning water.
- Adjustable safety separation grids to fit the type of dishes used.
- On the trolleys with fold-away grids, the front grid can be hooked on to the rear for easy access when loading and unloading.



800 541

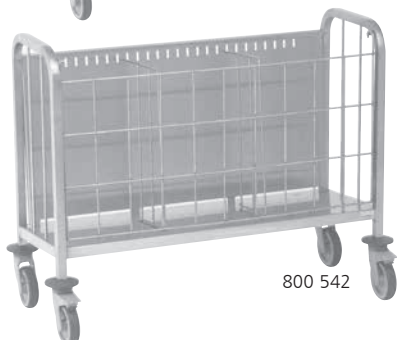

800 542



800 585



800 587

PLATE TROLLEYS

Stainless steel construction. Arched handles in tube 25 × 25 mm with adjustable separations. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Annular bumpers. Plates up to Ø 290 mm maximum.

Welded trolleys

Description	Overall Dim. l × W × h (mm)	With secure stacking partitions	With separation grills + removable front grill
		Ref.	Ref.
Trolley 200 plates	1065 × 450 × 810	<u>800 541</u>	<u>800 542</u>
Trolley 300 plates	1065 × 450 × 1000	<u>800 546</u>	<u>800 547</u>
Trolley 400 plates	1065 × 740 × 810	<u>800 551</u>	<u>800 552</u>

Plate trolleys - delivered as flat pack item

Description	Overall Dim. l × W × h (mm)	Reference
Trolley 200 plates with secure stacking partition	1065 × 450 × 810	<u>800 561</u>
Trolley 300 plates with secure stacking partition	1065 × 450 × 1000	<u>800 566</u>

Welded trolleys with raised platform

Raised platform, for a more ergonomic use: height 460 mm for trolley 200 plates and 485 mm for trolley 400 plates.

Description	Overall Dim. l × W × h (mm)	With secure stacking partitions	With separation grills + removable front grill
		Ref.	Ref.
Trolley 200 plates	1065 × 450 × 1000	<u>800 575</u>	<u>800 578</u>
Trolley 400 plates	1065 × 740 × 1000	<u>800 576</u>	<u>800 579</u>


2 tier welded trolleys

Trolleys with 2 tiers allowing more storage and more comfortable use. Welded construction, slightly sloping platforms for a good stability of stored products.

Description	Overall Dim. l × W × h (mm)	Reference
2 tier trolley (shelf heights 350 & 785 mm)	930 × 670 × 1160	<u>800 585</u>
2 tier trolley (shelf heights 600 & 1000 mm)	930 × 670 × 1410	<u>800 586</u>

3 tier welded trolleys

Description	Overall Dim. l × W × h (mm)	Reference
3 tier trolley (shelf heights 290 & 690 and 1090 mm)	990 × 670 × 1410	<u>800 587</u>



Consult'Express




Your shipping date

Plate trolley options



228 197

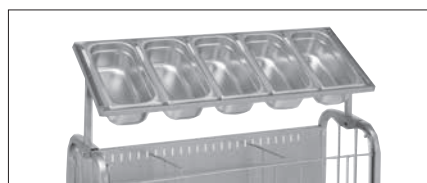

Cutlery dispenser (capacity 5 pans GN 1/3, containers not provided), height 300 mm.
Ref: 800 571

Description	Reference
Optional cutlery dispenser (1)	<u>800 571</u>
Optional divider for trolley 200 plates	<u>228 263</u>
Optional divider for trolley 300 plates	<u>228 264</u>
Optional divider for trolley 400 plates	<u>228 265</u>
Polyamide cover for trolley 200 plates	<u>228 196</u>
Polyamide cover for trolley 300 plates	<u>228 197</u>
Polyamide cover for trolley 400 plates and 2 tier trolley height 1160 mm (2)	<u>228 198</u>
Polyamide cover for trolley 200 plates with cutlery dispenser	<u>229 600</u>
Polyamide cover for trolley 300 plates with cutlery dispenser	<u>229 601</u>
Polyamide cover for trolley 400 plates with cutlery dispenser (2)	<u>229 602</u>

(1) Suitable for all plate trolleys except 2 tier trolleys

(2) Dimension of the cover 1035 × 700 × height 920 mm

Option

Extra cost for plate trolleys with stainless steel wheels (**83** instead of 80)



TROLLEYS FOR GN PANS

For draining and storage of GN pans, grids and covers. Stainless steel construction. Welded stainless steel tube. Tube 25 × 25 mm. Removable grids in wired stainless steel Ø 6 and 4 mm. Removable stop bars. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Annular bumpers. The trolleys have 4 tiers 325 mm high. Removable of second tier makes it possible to store up to 530 mm high.



Removable tier

805 604

Désignation	Overall Dim. l × W × h (mm)	Reference
Storage trolley with 18 cases per tier	678 × 620 × 1754	805 600
Storage trolley with 18 cases per tier, flat packed	678 × 620 × 1754	805 601
Storage trolley with 38 cases per tier	1278 × 620 × 1754	805 603
Storage trolley with 38 cases per tier, flat packed	1278 × 620 × 1754	805 604
Storage trolley with 51 cases per tier	1668 × 620 × 1754	805 606
Storage trolley with 51 cases per tier, flat packed	1668 × 620 × 1754	805 607
Cover for trolley, length 1278 mm	1278 × 620 × 1754	229 517
Cover for trolley, length 1668 mm	1668 × 620 × 1754	229 518

Option

Extra cost for trolleys for GN pans (small and large model) with stainless steel wheels (**83** instead of 80)



RACK AND TRAY DOLLEYS



General purpose rack dollies

Stainless steel construction. Base thickness 1,2 mm. Internal base dimensions: 510 x 510 mm. Bolted handle. 4 swivel wheels Ø 100 mm with galvanized steel cover. Max load: 80 kg.

Description	Overall Dim. l × w × h (mm)	Reference
General purpose stainless steel rack dolly	515 × 515 × 165	800 101
General purpose stainless steel rack dolly with handle	600 × 515 × 850	800 102



Rack dollies with ABS base

Stainless steel construction. Tube 25 × 25 mm. Removable ABS tray. Internal base dimensions: 510 × 510 mm. Bolted handle. 4 swivel wheels Ø 125 mm with polyamide cover (includes 2 brakes). Annular bumpers. Max load: 150 kg.

Description	Overall Dim. l × w × h (mm)	Reference
Rack dollies with ABS base	570 × 570 × 225	800 111
Rack dollies with ABS base and upstand	630 × 570 × 900	800 112



Stainless steel rack and tray dollies

Stainless steel frame construction 25 × 25 mm. Removable stainless steel base 1,2 mm thick. Internal base dimensions: 510 × 510 mm (rack dolly) and 750 × 510 mm (largest tray dolly). Bolted handle. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Annular bumpers. Max load: 150 kg.

Description	Overall Dim. l × w × h (mm)	Reference
Stainless steel rack dolly	570 × 570 × 225	800 125
Stainless steel rack dolly with upstand	630 × 570 × 900	800 126
Stainless steel tray dolly with upstand	870 × 570 × 900	800 130




Accessories

Description	Reference
Polyamide cover for rack dollies 530 × 530 × h. 300 mm	230 532
Polyamide cover 750 × 510 × h. 300 mm for trays dollies	221 234

Option

Extra cost for rack dollies and tray dollies* for GN pans (small and large model) with stainless steel wheels (**83** instead of 80)

* not suitable for rack dolly ref: 800 101 and 800 102)



Consult'Express



Your shipping date



Euronorm castor base

For trays or containers 600 × 400 mm. Food quality stainless steel construction. Tray thickness 1.2 mm. Useful dimensions 610 × 410 mm. Bolted handle. 4 swivel wheels Ø 100 mm with galvanized steel cover. Max load: 80 kg.

Description	Overall Dim. l × W × h (mm)	Reference
Euronorm castor base	615 × 415 × 165	<u>800 105</u>
Euronorm castor base with upstand	700 × 415 × 850	<u>800 106</u>

SINKS ON WHEELS

Soaking sinks:

Height: 900 mm on wheels for soaking and washing large-sized baskets and kitchen utensils. Stainless steel construction, tank 600 × 600 × 300 mm with drain plug, quarter-turn tap and stainless steel discharge tube, (42mm diameter) - 110 mm above finished floor level. Tubular frame 25 × 25 mm with 4 spacers, 4 swivel wheels with polyamide cover, 2 with brakes.



Stainless steel sinks 140 litres:

- **Ref: 806 050:** with strainer grill and overflow plug. 4 swivel wheels Ø 125 mm, including 2 brakes with galvanized steel cover.
- **Ref: 806 051:** with draining plug + stop grill. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes.

Polyethylene container with draining plug:

4 wheels with stainless steel cover: 2 fixed, 2 swivel Ø 160 mm.

Description	Overall Dim. l × W × h (mm)	Reference
Stainless steel soaking sink 100 litres	740 × 740 × 900	<u>806 066</u>
Stainless steel sink 140 litres	810 × 560 × 540	<u>806 050</u>
Stainless steel sink 140 litres (raised height)	810 × 560 × 750	<u>806 051</u>
Polyethylene sink 220 litres	900 × 700 × 735	<u>816 155</u>
Polyethylene sink 310 litres	1200 × 800 × 805	<u>816 157</u>
Polyethylene sink 500 litres	1200 × 800 × 1095	<u>816 158</u>

Extra-cost for stainless steel wheels for sinks 806 050 - Ref.: 702 202





GASTRONORM CONTAINER STORAGE TROLLEYS



- **Strength:**
max load 250 kg per trolley and 20 kg per level
- **Ergonomical:**
longitudinal reinforcement bar on 10-17-20 tier trolleys and GN 2/1 trolley with 15 tier which allow a maximum accessibility for front-loading

Stainless steel construction. Square tubes 25 × 25 mm. Welded tray runners with container stop. 4 swivel wheels Ø 125 mm, including 2 brakes, with polyamide cover. Annular bumpers. Overall dimensions: trolleys GN 1/1 size - 445 × 655 mm, trolleys GN 2/1 - 660 × 775 mm. Trolleys with 6 and 8 tiers include a top shelf. Max load: 20 Kg per tier and 250 Kg per trolley.



Welded tray runner GN trolleys

Description	e* (mm)	Height (mm)	Number of tiers	Reference
GN 1/1 trolley with top shelf	81	760	6	804 201
GN 1/1 trolley with top shelf	81	900	8	804 203
GN 1/1 trolley	144	1650	10	804 204
GN 1/1 trolley	81	1490	15	804 206
GN 1/1 trolley	81	1650	17	804 207
GN 1/1 trolley	77	1785	20	804 209
GN 2/1 trolley with top shelf	81	760	6	804 231
GN 2/1 trolley with top shelf	81	900	8	804 233
GN 2/1 trolley	144	1650	10	804 234
GN 2/1 trolley	81	1490	15	804 236
GN 2/1 trolley	81	1650	17	804 237
GN 2/1 trolley	77	1785	20	804 239

(*) e: vertical space between tray runners.

Option

Extra-cost for GN trolleys, GN trolley (flat packed) and stackable trolley with 4 stainless steel wheels including 2 brakes (**83** instead of 80)

Extra-cost for GN trolleys, GN trolley (flat packed) and stackable trolley with tie bars (**84** instead of 80)

Transport trolley

Stainless steel construction. Square tubular uprights 25 × 25 mm. Welded tray runners with stop blocks at the end. Closing bar for intensive use: transport inside a vehicle, loading, unloading, passing through doors whilst heavily loaded. Wheels Ø 125 with non protruding stainless steel cover to take up as little place as possible. Overall dimensions: 384 × 583 mm, height 1485 mm. Space between sliders 81 mm.

Description	Reference
Transport trolley GN 1/1 with 15 tiers	804 212



804 201




804 209



804 237




804 212



Consult'Express



Your shipping date

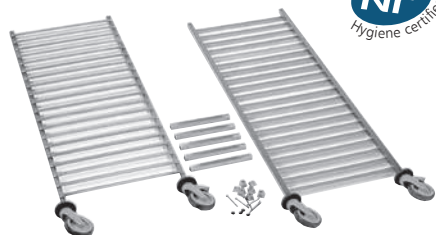

GN trolleys delivered flat packed

Delivered flat packed with shrink film delivery. Assembly by screw.

Description	e*(mm)	Height (mm)	Number of tiers	Reference
GN 1/1 trolley (flat packed)	81	1490	15	804 216
GN 1/1 trolley (flat packed)	81	1650	17	804 217
GN 1/1 trolley (flat packed)	77	1785	20	804 219
GN 2/1 trolley (flat packed)	81	1490	15	804 246
GN 2/1 trolley (flat packed)	81	1650	17	804 247
GN 2/1 trolley (flat packed)	77	1785	20	804 249

(*) e: vertical space between tray runners

GN stackable tray runner trolleys

Description	e* (mm)	Overall Dim. W x l x h (mm)	Number of tiers	Reference
GN 1/1 stackable trolley	77	455 x 655 x 1785	20	804 229
GN 2/1 stackable trolley	77	655 x 775 x 1785	20	804 259

(*) e: vertical space between tray runners

Washable covers

Covers for 6-8 tier trolleys. Covers with zip for 10 tiers trolley GN and more.

Description	W x l x h (mm)	For trolleys	Reference
Cover	405 x 590 x 740	GN 1/1 with 6-8 tiers	221 235
Cover	610 x 710 x 740	GN 2/1 with 6-8 tiers	221 236
Cover	405 x 605 x 1325	GN 1/1 with 15 tiers *	221 240
Cover	610 x 725 x 1325	GN 2/1 with 15 tiers	221 241
Cover	405 x 590 x 1620	GN 1/1 with 10-17-20 tiers	228 168
Cover	610 x 710 x 1620	GN 2/1 with 10-17-20 tiers	228 169

(*) including transport trolley

Disposable cover (box)

Disposable covers in polyethylene thickness 50 microns: delivered by box of 100 covers

Description	For trolleys	Reference
100 polyethylene cover	GN 1/1	228 170
100 polyethylene cover	GN 2/1	228 171

Unwinder for rolls of covers (rollers)

Stainless steel unwinder. Suits for rollers maxi length 80 cm and maxi diameter 30 cm. **Disposable covers in polyethylene**, thickness 15 microns, delivered in roller of 180 pre-cut covers suitable for trolleys up to 1785 mm height.

Description	Dimensions (mm)	Reference
Unwinder for rolls of covers	L 1050 x W 300 x H 250	805 776
Roller of 180 covers GN 1/1	L 600 x Ø 260	221 440
Roller of 180 covers GN 1/1	L 800 x Ø 260	221 439

228 169





EURONORM RACKING TROLLEYS

Stainless steel 25 × 25 frame construction. Argon welded tray runners with tray runner stops at each end. 4 swivel wheels Ø 125 mm, with polyamide cover (2 braked). Annular bumpers. The 9 tier trolleys include an upper shelf. Max load: 20 Kg per tier and 250 Kg per trolley.



Euronorm trolleys	Opening (mm)	e* (mm)	Overall Dim. W × l × h (mm)	Number of tiers	Reference
400 × 600 mm	400	70	540 × 725 × 900	9	804 155
400 × 600 mm	400	125	540 × 725 × 1785	12	804 156
400 × 600 mm	400	94	540 × 725 × 1785	16	804 157
600 × 400 mm (1)	600	94	732 × 525 × 1785	16	804 158
400 × 600 mm	400	75	540 × 725 × 1785	20	804 159
600 × 400 mm (1)	600	75	732 × 525 × 1785	20	804 160
400 × 800 mm	400	75	540 × 925 × 1785	20	804 161
600 × 800 mm (1)	600	94	732 × 925 × 1785	16	804 162
600 × 800 mm (1)	600	75	732 × 925 × 1785	20	804 163

(*) e: vertical space between tray runners.

(1) 600 mm opening trolleys do not accept ABS trays.

THE
TOURNUS
ASSET

- Hygiene certified
- Sturdy trolleys
- Stainless steel wheels
- Rolling quality

Extra-cost for euronorm trolleys

Description	Reference
Washable polyamide cover (for trolleys 400 × 600 mm, with 400 opening - except 9 tier model).	229 519

Option

Extra-cost for Euronorm trolley with 4 stainless steel wheels including 2 brakes (**83** instead of 80)

Extra-cost for Euronorm trolley with tie bars (**84** instead of 80)

STORAGE TROLLEYS

Stainless steel 25 × 25 frame construction. Argon welded tray runners with runner stops at each end. 4 swivel wheels Ø 125 mm, with galvanized steel wheel cover, non protruding, designed for heavy loads, freezing environment (-40°C) and proving chambers.

Euronorm storage trolleys	Opening (mm)	e* (mm)	Overall Dim. W × l × h (mm)	Number of tiers	Reference
600 × 800 mm	600	75	662 × 855 × 1775	20	814 321
800 × 600 mm	800	75	862 × 655 × 1775	20	814 322
1000 × 700 mm	1000	75	1062 × 755 × 1775	20	814 323
1000 × 800 mm	1000	75	1062 × 855 × 1775	20	814 324

With removable shelf

600 × 800 mm	600	75	662 × 855 × 1775	20	824 321
800 × 600 mm	800	75	862 × 655 × 1775	20	824 322
1000 × 700 mm	1000	75	1062 × 755 × 1775	20	824 323
1000 × 800 mm	1000	75	1062 × 855 × 1775	20	824 324






Consult'Express



Your shipping date



TROLLEYS FOR DOUGH CONTAINERS



804 165

Trolleys for round and rectangular dough containers. Welded stainless steel construction. Maximum load per level: 25 kg. Weight: 13 kg.

- **Tube structure:** uprights and spacers made of 25 × 25 mm section stainless steel tube, thickness 1,2 mm. 2 lower spacers made of 25 × 25 mm section stainless steel tube, thickness 1,2 mm.
- **Slide bars:** 7 levels of sliders made of stainless steel bent tube, Ø 12 mm, with spacing of 183 mm. Fitted into uprights and continuous argon welds with no added metal.
- **Wheels:** 4 swivel wheels Ø 125 mm with polyamide cover, 2 with brake.

Trolley for containers	Opening (mm)	Overall Dim. W × l × h (mm)	Reference
8 tier	195	470 × 660 × 1810	<u>804 165</u>



907 005

FLOUR CONTAINERS



Stainless steel construction. 4 swivel wheels Ø 100 mm with galvanized steel cover.

Description	Overall Dim. W × l × h (mm)	Reference
120 litre flour container + stainless steel lid	605 × 395 × 725	<u>907 005</u>
120 litre flour container with dividing panel + s/ steel lid	605 × 395 × 725	<u>806 150</u>

TROLLEYS FOR UTENSILS

- **Hook trolley:** Stainless steel construction. 4 swivel wheels Ø 100 mm with galvanized steel cover. 12 bars for utensils.
- **Accessories holder trolley:** Stainless steel construction. 4 swivel wheels Ø 100 mm with galvanized steel cover. 1 container GN 1/1, depth 40 mm removable, 3 bars for utensils with 1 hook.
- **Chef's trolley:** Stainless steel construction. 4 swivel wheels Ø 125 mm with polyamide cover, stainless steel axle and ball bearings. Sliding frame 7 GN 2/1 levels, 1 polyethylene worktop, 1 support for 6 poly. GN 1/6 depth 100 mm, pans provided, 1 lateral box for knives, 1 bar for accessories.

Description	Overall Dim. W × l × h (mm)	Reference
Hook trolley	660 × 640 × 1755	<u>906 440</u>
Holder trolley	560 × 365 × 1600	<u>801 310</u>
Chef's trolley	590 × 690 × 1750	<u>801 331</u>



906 440



801 331



801 310



PLATE STACKING TROLLEYS

Stainless steel structure. Anodised aluminium tubes 25 × 25 mm coating. Non-slip coating. Vertical space between tiers: 70 mm. Support adjustable to fit plate sizes (up to Ø 32 cm). The trolleys include 4 swivel wheels Ø 125 mm including 2 brakes, with polyamide cover.



801 232

THE
TOURNUS
ASSET

- **Excellent holding of plates:** the plates rest on 4 points, are held on top and underneath thereby ensuring they are fully horizontal.
- **Safe transport of plates** thanks to the non-slip coating of the fingers and the patented clip system.

Wall plate stacking trolleys

Description	Overall Dim. l × W × h (mm)	Reference
Wall plate stacking, 1 stack: 10 plates	371 × 248 × 770	801 231
Wall plate stacking, 2 stacks: 20 plates	711 × 248 × 770	801 232


Plate stacking trolleys

Description	Overall Dim. l × W × h (mm)	Reference
Plate stacking trolley, 2 stacks: 30 plates	420 × 670 × 1412	801 261
Plate stacking trolley, 4 stacks: 60 plates	730 × 670 × 1412	801 262
Plate stacking trolley, 4 stacks: 80 plates	730 × 670 × 1762	801 263
Plate stacking trolley, 6 stacks: 120 plates	1040 × 670 × 1762	801 264


Covers for plate stacking trolleys

Covers with 2 vertical and horizontal zippers for handle.

Description	Reference
Washable cover for trolley: 80 plates	228 176
Washable cover for trolley: 120 plates	228 177
Isotherm cover for trolley: 80 plates	228 179
Isotherm cover for trolley: 120 plates	228 180

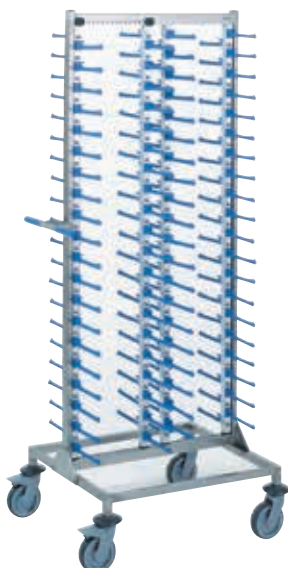

801 263

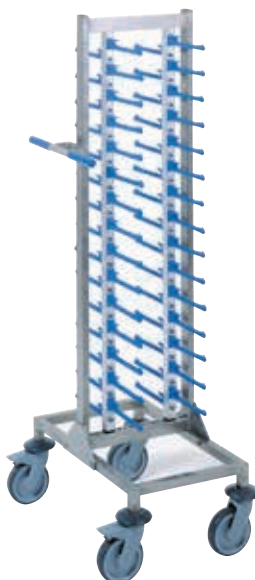


801 261



228 176



228 179



Consult'Express



Your shipping date

TROLLEYS FOR GN PANS



806 071

Welded stainless steel construction. Capacity: 2 × GN 1/1 pans or 1 × GN 2/1 pan, depth 200 mm (GN pans not provided). 4 swivel wheels Ø 125 mm, with polyamide cover, including 2 braked.

Description	Overall Dim. l × W × h (mm)	Reference
Stackable trolley for GN pans	740 × 625 × 850	<u>806 071</u>

Extra cost for 4 stainless steel wheels - Ref: 702 180

BREAKFAST TROLLEY

Trolley with upper shelf and anti-fall gallery rails. 2 × 7 level 1/1 GN tiers with 325 mm openings. With handle. 4 swivel wheels with polyamide cover including 2 brakes. Annular bumpers.



800 066

Description	Overall Dim. l × W × h (mm)	Reference
Breakfast trolley	850 × 640 × 1020	<u>800 066</u>



BAIN-MARIE HEATED TROLLEY

Stainless steel construction for GN 1/1 containers up to 200 mm deep (not supplied). Independant well regulated by separated thermostats with illuminated indicator. Heating by shielded resistances. Protection bumpers and lower shelf. Drain with 1/4 turn valve. 4 swivel wheels Ø 125 mm with polyamide cover including 2 brakes. Voltage 230V 50 Hz.



812 321

Description	Overall Dim. l × W × h (mm)	Reference
Bain-marie trolley, 2 containers	900 × 650 × 900	<u>812 321</u>
Bain-marie trolley, 3 containers	1300 × 650 × 900	<u>812 322</u>



KITCHEN TROLLEYS



- **Bread trolley:** Stainless steel construction. 4 swivel wheels Ø 125 mm, with polyamide cover, including 2 brakes. Rear preparation shelf for cutting bread. Width 350 mm, 2 copolyester 2/1 GN containers. Depth 200 mm on runners.
- **Vacuum packed food trolley:** Stainless steel construction. 4 swivel wheels Ø 125 mm, with polyamide cover, including 2 brakes. Removable waste bag folding holder 50 litres. Polyethylene sheet, perforated sheet. Polypropylene GN 1/1 container on slides.
- **Gutting trolley:** Stainless steel construction. 4 swivel wheels Ø 125 mm, with polyamide cover. Perforated top. Polyethylene sliding drawer.
- **Spice trolley:** Stainless steel construction. 4 swivel wheels Ø 125 mm, with polyamide cover including 2 brakes. Provided with 8 copolyester containers GN 1/6 depth 100 + lids.



Description	Overall Dim. l x W x h (mm)	Reference
Bread trolley	770 x 700 x 775	<u>801 341</u>
Vacuum packed food trolley	850 x 600 x 850	<u>906 521</u>
Gutting trolley	850 x 600 x 850	<u>906 520</u>
Spice trolley	720 x 410 x 750	<u>906 446</u>

CLEARING TROLLEY



800 061

Delivered with 3 stainless steel 1/3 GN cutlery pans, 100 mm deep, waste chute with rubber flange. 4 swivel wheels with polyamide cover including 2 brakes. Annular bumpers.

Description	Overall Dim. l x W x h (mm)	Reference
Clearing trolley	1330 x 640 x 920	<u>800 061</u>

MULTI-PURPOSE TROLLEY




801 625

Trolley with 2 trays 1000 x 600 mm. **Smooth and sturdy trays.** Horizontal handle. **Max load: 100 kg/ tray.** 4 swivel wheels Ø 125 mm including 2 brakes.

Description	Overall Dim. l x W x h (mm)	Reference
Multi-purpose trolley	1070 x 670 x 850	<u>801 625</u>

Option

Extra cost for multi-purpose trolleys with stainless steel wheels (**83** instead of 80)



Consult'Express



Your shipping date

PLATFORM TROLLEYS



802 160



802 162

Platform 1000 × 600 mm. 4 wheels: 4 swivel wheels Ø 160 mm, with galvanized steel cover, nylon tread. Max load: 350 Kg.

Description	Overall Dim. l × w × h (mm)	Reference
Open aluminium platform trolley	1250 × 600 × 1000	<u>802 160</u>
Aluminium platform trolley with solid base	1250 × 600 × 1000	<u>802 162</u>
Open S/ steel platform trolley	1200 × 600 × 1000	<u>802 165</u>
S/ steel platform trolley with solid base	1200 × 600 × 1000	<u>802 166</u>

Extra-cost for rubber bumpers on 3 sides - Ref. 702 211

Option

Extra cost for platform trolleys with stainless steel wheels Ø 160 mm (**83** instead of 80)

LABORATORY TROLLEYS



801 271

Stainless steel tube 35 × 35 mm. Removable stainless steel punnet basket. 4 swivel wheels Ø 125 mm with galvanized steel cover including 2 brakes

Description	Overall Dim. l × w × h (mm)	Reference
Single tray holder, basket 1220 × 400 × 500 mm	1310 × 500 × 750	<u>801 271</u>
Double tray holder, basket 1220 × 400 × 500 mm	1310 × 500 × 1110	<u>801 276</u>

MEAT HOOK TROLLEYS



802 010

Aluminium construction. Max load: 600 kg. 4 wheels: 2 fixed, 2 swivel, with galvanized steel cover Ø 160 mm (small trolley model), Ø 200 mm (large trolley model).

Description	Overall Dim. l × w × h (mm)	Reference
Meat hook trolleys small model	1150 × 750 × 1800	<u>802 010</u>
Meat hook trolleys large model	1800 × 750 × 1800	<u>802 020</u>

- Extra-cost for trolley equipped with 4 stainless steel wheels Ø 160 mm : 702 201
- Extra-cost for trolley equipped with 4 stainless steel wheels Ø 200 mm : 702 203

ANGLE BAR



Stainless steel construction, 40 × 40 mm, 1 mm thick.

Description	Lengths (mm)	Reference
Angle bar	1500	<u>803 392</u>
Angle bar	2000	<u>803 393</u>
Angle bar	2500	<u>803 394</u>

EXPORT TEAM



Romain BRETON
Export Director
Northern Europe
Mob: + 33 6 83 66 30 85
rbreton@tournus.com

Frédéric DOUX
Benelux, Switzerland,
Caribbean
Mob: + 33 6 07 27 10 53
fdoux@tournus.com

Giorgia STEFANI
Italy
Mob: + 39 338 498 50 09
gstefani@tournus.com

Georges WARDE
Middle East, Africa, Asia
Mob: + 33 6 11 17 53 98
gwarde@tournus.com

Vibin THOMAS
UAE, Oman, Kuwait, Bahrain
Mob: + 971 56 441 78 40
vthomas@tournus.com

Claudia SCHMITT
Germany
Mob: + 49 176 81009375
claudia.schmitt@vskraus.de

BACK OFFICE

Carine VILLANI
Mob: + 33 3 85 27 42 43
cvillani@tournus.com

Emeline RAVET
Tel : + 33 3 85 27 42 74
eravet@tournus.com

Virginie POITOUX
Mob: + 33 3 85 27 42 65
vpoitoux@tournus.com

TOURNUS EQUIPEMENT
25 avenue Jean Moulin
CS 20005
71700 TOURNUS - FRANCE

Code APE2893 Z - RC Mâcon B383 567 104
Fax : + 33 3 85 27 42 60
export@tournus.com

www.tournus.com

Non-contractual documents. The specifications given are subject to change with a view to improvement. • 05/2024 - EN100214-0

Join us...

