

**Technical Data:**


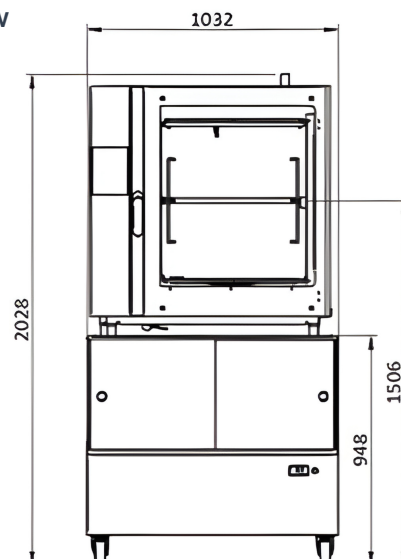
Dimensions	1032 x 2028 x 859 mm
No of Spits	5
Voltage	415 3 Phase
Amperage	20 A
Connected Power	Rotisserie: 7.9 kW three phase AC, 20 A Display: 2.4 kW single phase AC, 15 A
Hourly Capacity	10/15 vol (depending on weight)
Weight	350 kg

Product Description:

- Fully automatic self-cleaning with eco-friendly closed-loop system and professional detergent tablets
- Sleek touch glass control panel with intuitive operation and interactive diagnostics
- Modern see-through design with LED lighting for optimized visibility
- Ventilated hot air and infrared technology cooks 1.2 kg chicken in under 1 hour
- Dual-sided glass door, end-of-cooking alert, and double-glazed burn-resistant glass

Installation requirements:

- Electrical power provided by customer.
- Cold water supply

Accessories:
_____**Front View****Side View**